

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
16 May 2002 (16.05.2002)

PCT

(10) International Publication Number  
**WO 02/38850 A2**

(51) International Patent Classification<sup>7</sup>: **D06M 15/277**,  
13/156, 13/265

(74) Agents: **KOKKO, Kent S.** et al.; Office of Intellectual  
Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-  
3427 (US).

(21) International Application Number: **PCT/US01/46983**

(22) International Filing Date:  
6 November 2001 (06.11.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/708,372 8 November 2000 (08.11.2000) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT  
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE  
(utility model), DK, DK (utility model), DM, DZ, EC, EE,  
EE (utility model), ES, FI, FI (utility model), GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU,  
SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR,  
TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(71) Applicant (*for all designated States except US*): **3M IN-  
NOVATIVE PROPERTIES COMPANY** [US/US]; 3M  
Center, Post Office Box 33427, Saint Paul, MN 55133-  
3427 (US).

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD,  
TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **JARIWALA,**  
**Chetan P.** [US/US]; 3164 Copper Oaks Trail, Woodbury,  
MN 55125 (US). **EGGLESTON, James D.** [US/US];  
400 Selvy Avenue, Apartment 212, Saint Paul, MN 55102  
(US). **YANDRASITS, Michael A.** [US/US]; 323 Ramsey  
Street, Hastings, MN 55033 (US). **DAMS, Rudolf J.**  
[BE/BE]; Schuttershof 19, B-2070 Zwijndrecht (BE).  
**COPPENS, Dirk M.** [BE/BE]; Tijnstraat 30, B-9120  
Melsele (BE).

**Published:**

— *without international search report and to be republished  
upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

WO 02/38850 A2

(54) Title: **ALKYLATED FLUORO-CHEMICAL OLIGOMERS AND USE THEREOF IN THE TREATMENT OF FIBROUS  
SUBSTRATES**

(57) Abstract: This invention provides a method of treating fibrous substrates, such as leather, by contacting the substrate with a fluorochemical compound comprising: a fluorochemical oligomeric portion comprising an aliphatic backbone with a plurality of pendant fluoroaliphatic groups, each fluoroaliphatic group having a fully fluorinated terminal group and each independently linked to a carbon atom of the aliphatic backbone through an organic linking group; an aliphatic moiety; and a linking group which links the fluorochemical oligomeric portion to the aliphatic moiety. The fluorochemical compounds provide desirable oil, water and stain repellency to fibrous substrates.

## ALKYLATED FLUOROCHEMICAL OLIGOMERS AND USE THEREOF IN THE TREATMENT OF FIBROUS SUBSTRATES

5           This invention relates to fluorochemical compositions for use in providing repellent properties to a fibrous substrate material. In another aspect, this invention relates to fluorochemical compounds that contain pendent fluoroaliphatic groups proximal to one another. In yet another aspect, it relates to fluorochemical compounds that are at least in part oligomeric in nature.

10

          The utility of organofluorine compounds as surface-active agents (i.e., surfactants) and surface-treating agents is due in large part to the extremely low free-surface energy of a C<sub>6</sub>-C<sub>12</sub> fluorocarbon group, according to H. C. Fielding, "Organofluorine Compounds and Their Applications," R. E. Banks, Ed., Society of Chemical Industry at p. 214 (1979).  
15       Generally, the organofluorine substances described above are those which have carbon-bonded fluorine in the form of a monovalent fluoroaliphatic radical such as a perfluoroalkyl group, typically -C<sub>n</sub>F<sub>2n+1</sub>, where n is at least 3, the terminal part of which group is trifluoromethyl, -CF<sub>3</sub>.

20

          U.S. Pat. No. 3,758,447 (Falk et al.) describes polymers that result from free radical polymerization of a monomer in the presence of perfluoroalkyl mercaptans, which act as chain-transfer agents. Mercaptans that contain pairs or triplets of closely-packed perfluoroalkyl groups are said to produce polymers with higher oil repellency levels compared with analogous polymers derived from a mercaptan with just one perfluoroalkyl  
25       group or perfluoroalkyl groups that are not closely packed.

25

          U.S. 5,453,540 (Dams et al.) describes fluorochemical compositions for the treatment of textiles comprising:

          (i) a fluorochemical oligomeric portion comprising an aliphatic backbone with a plurality of fluoroaliphatic groups attached thereto, each fluoroaliphatic group having a  
30       fully fluorinated terminal group and each independently linked to a carbon atom of the aliphatic backbone through an organic linking group;

(ii) an organic moiety (which can be functional or non-functional, and which is different from the fluorochemical oligomeric portion);

(iii) a non-polymeric isocyanate-derived linking group which links the fluorochemical oligomeric portion to the organic moiety; and

5 (iv) a group bonded thereto, which can impart soft hand, stain release, water repellency, or a durable property when the compound is applied to a fibrous substrate.

J. Polymer Science, Part A 1988, 26, 2991 (Chujo et al.) describes a di-carboxyl terminated macromonomer prepared by the free radical co-polymerization of a  
10 perfluoroalkylethyl acrylate and methyl methacrylate in the presence of thiomalic acid. Also described is the reaction of such macromonomers with organic dicarboxylic acids and organic diamines in the presence of an appropriate catalyst to afford a copolymer wherein the macromonomer is grafted onto a polyamide chain.

15 The treatment of hides and skins to form leather involves a number of interdependent chemical and mechanical operations. These operations may be divided into a sequence of "wet end" steps followed by a sequence of "dry" steps. A description of each of these operations is provided in Fundamentals of Leather Manufacturing, Prof Dr Heidemann (Eduard Roether KG, 1993). The primary tanning operation involves the  
20 treatment of the hide to preserve it and form useful leather. Chrome tanning salts are well known and widely used for this purpose. Chrome-tanned hides or skins are known in the art as "wet blue leather". In order to produce a uniform piece of leather with the required physical and aesthetic properties, a second tanning step, known as "retanning" is employed. Retanning can be accomplished using a variety of naturally derived materials  
25 including extracts from vegetables or plants, and synthetic tanning agents known as "syntans", or combinations thereof. After or during retanning, the leather can be colored and fatliquored.

A number of publications have proposed various copolymers for treating leather  
30 during tanning and retanning, addressing the problem of making treated leather more water resistant or completely waterproof.

EP-A-372 746 discloses a method and process for treating leather utilizing selected amphiphilic copolymers for improving the strength, temper and water resistance of the leather. The amphiphilic copolymers are formed from a predominant amount of at least one hydrophobic monomer and a minor amount of at least one copolymerizable  
5 hydrophilic monomer. The application states that the process may be particularly useful as a one step substitute for conventional retanning and fatliquoring treatment steps.

EP-A-682 044 discloses copolymers comprising ethylenically unsaturated dicarboxylic acid anhydrides, long chain olefins and fluorolefins. Leathers treated with  
10 these polymers are shown to yield good waterproofness results according to the Bally-Penotrometer test.

US 5,124,181 discloses copolymers which contain a) from 50 to 90% by weight of C<sub>8</sub>-C<sub>40</sub>-alkyl methacrylates, vinyl esters of C<sub>8</sub>-C<sub>40</sub>-carboxylic acids or mixtures thereof  
15 and b) from 10 to 50% by weight of monoethylenically unsaturated C<sub>3</sub>-C<sub>12</sub>-carboxylic acids, monoethylenically unsaturated dicarboxylic anhydrides, monoesters or monoamides of monoethylenically unsaturated C<sub>4</sub>-C<sub>12</sub>-dicarboxylic acids, amides of C<sub>3</sub>-C<sub>12</sub>-monocarboxylic acids or mixtures thereof as copolymerized units and which have  
20 molecular weights of from 500 to 30,000. The copolymers are used in at least partially neutralized form in aqueous solution or dispersion for making leather and furs water repellent.

WO 94/01587 discloses water-dispersible and/or water-emulsifiable co-oligomers containing (a) fatty crotonates ; (b) radically copolymerizable, hydrophilic, ethylenically  
25 unsaturated acids and/or their anhydrides, and possibly (c) minor amounts of other copolymerizable comonomers. These co-oligomers are used as amphiphilic agents for greasing leather and pelts.

Despite the various publications there continues to be a need for further  
30 fluorochemical compositions for the treatment of leather to impart desired properties thereto such as water repellency, water proofness, oil repellency and stain resistance. It is further desired that such fluorochemical compositions be readily produced in a cost

effective way, have sufficient storage stability and are efficient even if applied in low quantities to the substrate. Highly desired fluorochemical compositions are those that can impart both good water repellency as well as oil repellency to leather substrates. In one aspect, the present invention relates to the wet end operations which take place after  
5 primary tanning, namely retanning and fatliquoring.

### Summary of the invention

This invention provides a method of treating fibrous substrates comprising contacting the fibrous substrate with a composition comprising alkylated fluorochemical  
10 oligomeric compounds comprising:

(i) a fluorochemical oligomeric portion comprising an aliphatic backbone with a plurality of pendant fluoroaliphatic groups, each fluoroaliphatic group having a fully fluorinated terminal group and each independently linked to a carbon atom of the aliphatic backbone through an organic linking group;

15 (ii) an aliphatic moiety; and

(iii) a linking group which links the fluorochemical oligomeric portion to the aliphatic moiety.

In another aspect, the invention provides a method of treating fibrous substrates comprising contacting the fibrous substrate with a composition comprising alkylated  
20 fluorochemical oligomeric compounds comprising:

(i) an oligomeric portion having both fluoroaliphatic and fluorine-free aliphatic pendent groups;

(ii) an aliphatic moiety; and

25 (iii) a linking group which links the oligomeric portion to the aliphatic moiety.

In another aspect, the present invention provides a fluorochemical leather treatment composition comprising at least one fluorochemical compound described herein. In another aspect, the present invention provides a treated substrate comprising a coating of  
30 the treatment composition on at least a portion of the substrate.

Preferably, the fluorochemical oligomeric compounds exhibit a receding contact angle, to hexadecane, of at least 30°, as defined by the test method described herein. Such compounds have improved anti-staining properties, as well as desirable oil- and water-repellent properties.

5

The composition comprising alkylated fluorochemical oligomeric compounds can be applied in the form of an aqueous dispersion or emulsion, or as a solution thereof in an organic solvent. The aqueous dispersions are preferred for environmental reasons. Application of the composition onto a substrate may be done by spraying, padding, roll coating, brushing or exhausting the composition onto a substrate and drying the treated substrate.


10

### Detailed Description

The alkylated fluorochemical oligomers in a composition useful in the invention generally contain a plurality of pendant fluoroaliphatic groups proximal to one another (e.g., located on alternating carbon atoms of an aliphatic backbone, or occasionally on adjacent carbon atoms), as distinct from isolated fluoroaliphatic groups randomly distributed throughout the compound and also as distinct from fluoroaliphatic groups uniformly located on adjacent carbon atoms.

20

In other preferred embodiments, the invention provides a method of treating fibrous substrates comprising contacting the substrate with fluorochemical compositions comprising fluorinated compounds of Formulas I or II




wherein

30 m is 1 to 4 inclusive;

n is 1 to 4 inclusive;

each L independently comprises a linking group;




R is a saturated or unsaturated aliphatic moiety; and

A is a fluorochemical oligomeric portion of the formula:

### III

wherein

- 5 a is a number such that A is oligomeric and comprises a plurality of pendent  $\text{R}_f$  groups;  
 each  $\text{R}_1$  is independently hydrogen, halogen, or straight chain or branched chain alkyl  
 containing 1 to about 4 carbon atoms;  
 each  $\text{R}_2$  is independently hydrogen or straight chain or branched chain alkyl containing 1  
 to about 4 carbon atoms;  
 10 each Q is a covalent bond or an organic linking group, such as a sulfonamidoalkylene  
 group;  
 $\text{R}_f$  is a fluoroaliphatic group, such as  $-(\text{CF}_2)_7\text{CF}_3$ , that comprises a fully fluorinated  
 terminal group;  
 X is a hydrogen atom or a group derived from a free radical initiator (e.g. t-butoxy).  
 15 A may further comprise a fluorochemical oligomeric portion of Formula IV:

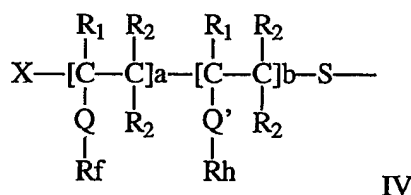


### IV

- wherein the sum of  $a + b$  is a number such that A is oligomeric,  
 each  $\text{R}_1$  is independently hydrogen, halogen, or straight chain or branched chain alkyl  
 20 containing 1 to about 4 carbon atoms;  
 each  $\text{R}_2$  is independently hydrogen or straight chain or branched chain alkyl containing 1  
 to about 4 carbon atoms;  
 Q and Q' are each independently a covalent bond or an organic linking group,  
 $\text{R}_f$  is a fluoroaliphatic group, such as  $-(\text{CF}_2)_3\text{CF}_3$ , that comprises a fully fluorinated  
 25 terminal group;

$R_h$  is a fluorine-free aliphatic group; having at least 1, preferably having 6 or greater carbon atoms.


5 Preferably, with reference to Formulas I and II, both  $m$  and  $n$  are one to produce an alkylated oligomeric fluorochemical of the Formulas V or VI:



Preferably the ratio of  $a:b$  is 2:1 or more, more preferably 4:1 or more.

10 Preferably, with respect to Formulas I to IV, at least one of said  $R$  and  $R_h$  groups has 8 or more carbon atoms.

With reference to Formulas III to VI, it will be understood that the oligomer may have a random distribution of fluorinated and fluorine-free segments, or a sequential arrangement where the oligomer comprises "blocks" of fluorinated and fluorine-free segments, i.e. a block copolymer. Further it will be understood that the relative position of the units derived from fluorinated monomers and fluorine-free monomers may vary with respect to the  $X$  and  $S$  moieties. In essence the following structures are both within the scope of the invention:

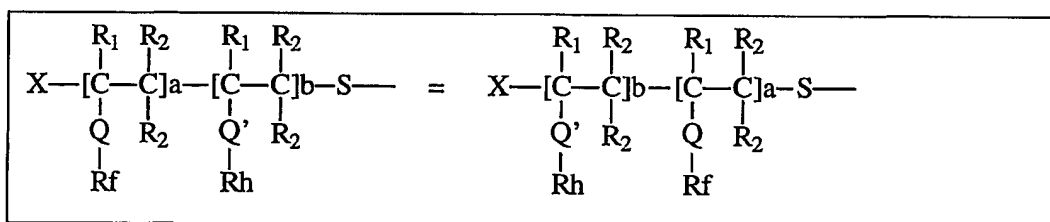

20 As described above and further illustrated in Formulas I-VI, a fluorochemical composition useful in the invention comprises an alkylated fluorochemical oligomeric compound that generally has three principal portions: at least one fluorochemical oligomeric portion "A", a linking group "L", and at least one aliphatic moiety "R". The fluorochemical oligomeric portion and the organic moiety are linked together by linking



group L. The linking group may be a covalent bond, may result from a condensation reaction between a nucleophile, such as an alcohol, an amine, or a thiol, and an electrophile such as a carboxylic acid, ester, acyl halide, sulfonate ester, sulfonyl halide, cyanate, isocyanate, or may result from a nucleophilic displacement reaction between a nucleophile, such as previously described, and a moiety bearing a leaving group, such as the reaction between an alcohol (or alkoxide) and an alkyl halide (where the halogen atom of the alkyl halide serves as a leaving group).

Examples of suitable linking groups L include a covalent bond, straight chain, branched chain, or cyclic alkylene, arylene, aralkylene, oxy, oxo, hydroxy, thio, sulfonyl, sulfoxy, amino, imino, sulfonamido, carboxamido, carbonyloxy, urethanylene, ureylene, and combinations thereof such as sulfonamidoalkylene.

A salient component of the fluorochemical oligomeric portion is the fluoroaliphatic group, designated herein as  $R_f$ . The fluorinated compound of the invention contains a plurality of pendent  $R_f$  groups (e.g., from 2 to about 10) proximal to one another and preferably contains from about 5 percent to about 80 percent, more preferably from about 20 percent to about 65 percent, and most preferably about 25 percent to about 55 percent fluorine by weight, based on the total weight of the compound, the loci of the fluorine being essentially in the  $R_f$  groups.  $R_f$  is a stable, inert, non-polar, preferably saturated, monovalent moiety which is both oleophobic and hydrophobic.  $R_f$  preferably contains at least about 3 carbon atoms, more preferably 3 to about 20 carbon atoms, and most preferably about 4 to about 14 carbon atoms.  $R_f$  can contain straight chain, branched chain, or cyclic fluorinated alkylene groups or combinations thereof or combinations thereof with straight chain, branched chain, or cyclic alkylene groups.  $R_f$  is preferably free of polymerizable olefinic unsaturation and can optionally contain catenary heteroatoms such as divalent oxygen, or trivalent nitrogen. It is preferred that  $R_f$  contain about 35% to about 78% fluorine by weight, more preferably about 40% to about 78% fluorine by weight. The terminal portion of the  $R_f$  group contains a fully fluorinated terminal group. This terminal group preferably contains at least 7 fluorine atoms, e.g.,  $CF_3CF_2CF_2-$ ,  $(CF_3)_2CF-$ , or the like. Perfluorinated aliphatic groups (i.e., those of the formula  $C_oF_{2o+1}$ , where o is 4 to 14 are the most preferred embodiments of  $R_f$ .

The aliphatic backbone of the fluorochemical oligomeric portion comprises a sufficient number of polymerized units to render the portion oligomeric. The aliphatic backbone comprises from 2 to about 25 polymerized units ("a" and "b" in Formula III to VI) derived from fluorinated and fluorine-free monomers (i.e., monomers containing a fluoroaliphatic group,  $R_f$  and/or fluorine-free aliphatic group,  $R_h$ , as defined above), it is more preferred that the aliphatic backbone comprise from 3 to about 10, most preferably 4 to about 8, polymerized units.

The fluorochemical compositions of the invention generally comprise mixtures of alkylated fluorochemical oligomeric compounds. Accordingly, compounds are sometimes referred to herein as having non-integral numbers of particular substituents (e.g., "a=2.7"). In such cases the number indicates an average and is not intended to denote fractional incorporation of a substituent. The terms "oligomer" or "oligomeric" when used herein designate compounds containing a plurality of polymerized units, but fewer than that number of polymerized units present in a polymer (e.g., chains of 2 to about 25 polymerized units are to be considered "oligomeric").

The fluoroaliphatic group  $R_f$  and the fluorine-free aliphatic group are each linked to the organic portion (i.e. the oligomeric backbone or the unsaturated portion of the monomer) by a linking groups designated as Q and Q' respectively in the Formulas III to VI used herein. Q and Q' are independently linking groups that may be a covalent bond, divalent alkylene, or a group that can result from the condensation reaction of a nucleophile such as an alcohol, an amine, or a thiol with and electrophile, such as an ester, acid halide, isocyanate, sulfonyl halide, sulfonyl ester, or may result from a displacement reaction between a nucleophile and leaving group. Each Q and Q' is are independently chosen, preferably contains from 1 to about 20 carbon atoms and can optionally contain catenary oxygen, nitrogen, sulfur, or silicon-containing groups or a combination thereof. Q and Q' is preferably free of functional groups that substantially interfere with free-radical oligomerization (e.g., polymerizable olefinic double bonds, thiols, easily abstracted hydrogen atoms such as cumyl hydrogens, and other such functionality known to those skilled in the art). Examples of suitable linking groups Q and Q' include straight chain,

branched chain, or cyclic alkylene, arylene, aralkylene; oxy, oxo, hydroxy, thio, sulfonyl, sulfoxy, amino, imino, sulfonamido, carboxamido, carbonyloxy, urethanylene, urylene, and combinations thereof such as sulfonamidoalkylene. Preferably linking group Q is a covalent bond or a sulfonamidoalkylene group. Preferably linking group Q' is a covalent bond.

Suitable linking groups Q and Q' include the following structures, and combination of such structures, in addition to a covalent bond. For the purposes of this list, each k is independently an integer from 0 to about 20, R<sub>1</sub>' is hydrogen, phenyl, or alkyl of 1 to about 4 carbon atoms, and R<sub>2</sub>' is alkyl of 1 to about 20 carbon atoms. Each structure is non-directional, i.e. -(CH<sub>2</sub>)<sub>k</sub>C(O)O- is equivalent to -O(O)C(CH<sub>2</sub>)<sub>k</sub>-.

-SO <sub>2</sub> NR <sub>1</sub> '(CH <sub>2</sub> ) <sub>k</sub> O(O)C-	-CONR <sub>1</sub> '(CH <sub>2</sub> ) <sub>k</sub> O(O)C-
-(CH <sub>2</sub> ) <sub>k</sub> O(O)C-	-CH <sub>2</sub> CH(OR <sub>2</sub> ')CH <sub>2</sub> O(O)C-
-(CH <sub>2</sub> ) <sub>k</sub> C(O)O-	-(CH <sub>2</sub> ) <sub>k</sub> SC(O)-
-(CH <sub>2</sub> ) <sub>k</sub> O(CH <sub>2</sub> ) <sub>k</sub> O(O)C-	-(CH <sub>2</sub> ) <sub>k</sub> S(CH <sub>2</sub> ) <sub>k</sub> O(O)C-
-(CH <sub>2</sub> ) <sub>k</sub> SO <sub>2</sub> (CH <sub>2</sub> ) <sub>k</sub> O(O)C-	-(CH <sub>2</sub> ) <sub>k</sub> S(CH <sub>2</sub> ) <sub>k</sub> OC(O)-
-(CH <sub>2</sub> ) <sub>k</sub> SO <sub>2</sub> NR <sub>1</sub> '(CH <sub>2</sub> ) <sub>k</sub> O(O)C-	-(CH <sub>2</sub> ) <sub>k</sub> SO <sub>2</sub> -
-SO <sub>2</sub> NR <sub>1</sub> '(CH <sub>2</sub> ) <sub>k</sub> O-	-SO <sub>2</sub> NR <sub>1</sub> '(CH <sub>2</sub> ) <sub>k</sub> -
-(CH <sub>2</sub> ) <sub>k</sub> O(CH <sub>2</sub> ) <sub>k</sub> C(O)O-	-(CH <sub>2</sub> ) <sub>k</sub> SO <sub>2</sub> NR <sub>1</sub> '(CH <sub>2</sub> ) <sub>k</sub> C(O)O-
-(CH <sub>2</sub> ) <sub>k</sub> SO <sub>2</sub> (CH <sub>2</sub> ) <sub>k</sub> C(O)O-	-CONR <sub>1</sub> '(CH <sub>2</sub> ) <sub>k</sub> C(O)O-
-(CH <sub>2</sub> ) <sub>k</sub> S(CH <sub>2</sub> ) <sub>k</sub> C(O)O-	-CH <sub>2</sub> CH(OR <sub>2</sub> ')CH <sub>2</sub> C(O)O-
-SO <sub>2</sub> NR <sub>1</sub> '(CH <sub>2</sub> ) <sub>k</sub> C(O)O-	-(CH <sub>2</sub> ) <sub>k</sub> O-
-(CH <sub>2</sub> ) <sub>k</sub> NR <sub>1</sub> 'C(O)O-	-OC(O)NR'(CH <sub>2</sub> ) <sub>k</sub> -

The organic aliphatic moiety, designated R in compounds of Formulas I-VI is a mono-, di-, tri- or tetravalent, linear or branched chain, saturated or unsaturated, cyclic or acyclic (or any combination thereof) organic aliphatic group having at least one, preferably from 12 to 75 carbon atoms. In certain embodiments R may be fluorinated (i.e. R = R<sub>F</sub>). The valency is equivalent to the value of n in Formula I and is equal to 1 in Formula II. The range of structures contemplated for the organic moiety R will be better understood with reference to the compounds suitable for use in steps of the Reaction

Schemes described in detail below. Preferably R is a monovalent alkyl group having at least one, preferably from 12 to 75 carbon atoms, most preferably 16 to 60 carbon atoms. Where more than one R group is present, such as in Formula II, or when n is greater than one in Formula I, the sum of the carbon atoms in the R groups is preferably from 12 to 100 carbon atoms.

The fluorinated compounds and fluorochemical compositions useful in the invention will be illustrated with reference to the embodiments shown in Formulas I-VI. In such embodiments, linking group L links the fluorochemical oligomeric portion A to the aliphatic group R. Each linking group L may be a covalent bond, a di- or polyvalent alkylene group, or a group that can result from the condensation reaction of a nucleophile such as an alcohol, an amine, or a thiol with an electrophile, such as an ester, acid halide, isocyanate, sulfonyl halide, sulfonyl ester, or may result from a displacement reaction between a nucleophile and leaving group. Each L is independently chosen, preferably contains from 1 to about 20 carbon atoms and can optionally contain catenary (i.e. in-chain) oxygen, nitrogen, sulfur, or silicon-containing groups or a combination thereof. L is preferably free of functional groups that substantially interfere with free-radical oligomerization (e.g., polymerizable olefinic double bonds, thiols, easily abstracted hydrogen atoms such as cumyl hydrogens, and other such detrimental functionalities known to those skilled in the art). Examples of suitable linking groups L include straight chain, branched chain, or cyclic alkylene, arylene, aralkylene, oxy, oxo, sulfonyl, sulfoxy, amino, imino, sulfonamido, carboxamido, carbonyloxy, urethanylene, ureylene, and combinations thereof such as sulfonamidoalkylene. In addition to a covalent bond, preferred L groups include the following structures (including combinations and multiples thereof) wherein each k is independently an integer from 0 to about 20, R<sub>2</sub>' is alkyl of 1 to about 20 carbon atoms.

$-(CH_2)_kO(O)C-$	$-CH_2CH(OR_2')CH_2C(O)O-$
$-(CH_2)_kC(O)O-$	$-(CH_2)_kO-$
$-(CH_2)_kO(CH_2)_kO(O)C-$ and	a covalent bond

Returning now to Formulas III to VI above,  $R_1$  is hydrogen, halogen (e.g., fluoro, chloro, bromo), or straight chain or branched chain alkyl of 1 to about 4 carbon atoms (e.g., methyl, ethyl, propyl, isopropyl, butyl, isobutyl, and the like). Each  $R_2$  is independently hydrogen or straight chain or branched chain alkyl of 1 to about 4 carbon atoms.

X is a group derived from a free-radical initiator. As used herein, the term "free-radical initiator" designates any of the conventional compounds such as organic azo compounds, organic peroxides (e.g., diacyl peroxides, peroxyesters, dialkyl peroxides) and the like that provide initiating radicals upon homolysis. As used herein, the term "group derived from a free-radical initiator" designates an initiating radical formed upon homolytic decomposition of a free-radical initiator.

Suitable groups X include non-reactive groups such as a hydrogen atom, t-butoxy (derived from di-t-butylperoxide), and benzoyloxy (derived from benzoyl peroxide), and reactive groups such as  $-\text{CCH}_3(\text{CN})\text{CH}_2\text{CH}_2\text{CO}_2\text{H}$  (derived from azo-4-cyanoisovaleric acid),  $-\text{C}(\text{CH}_3)_2\text{CN}$  (derived from azoisobutyronitrile), and those derived from other known functional azo compounds such as 2,2'-azobis[N-(4-chlorophenyl)-2-methylpropionamidine]-dihydrochloride; 2,2'-azobis[N-(4-hydroxyphenyl)-2-methylpropionamidine]-dihydrochloride; 2,2'-azobis[N-(4-aminophenyl)-2-methylpropionamidine]-tetrahydrochloride; 2,2'-azobis[2-methyl-N-2-propenylpropionamidine]-dihydrochloride; 2,2'-azobis[N-(2-hydroxyethyl)-2-methylpropionamidine]-dihydrochloride; 2,2'-azobis[2-methyl-N-(2-hydroxyethyl)-propionamide]; 2,2'-azobis[2-(hydroxymethyl)propionitrile]; 2,2'-azobis[2-methyl-N-[1,1-bis(hydroxymethyl)-2-hydroxyethyl]propionamide]; and 2,2'-azobis{2-methyl-N-[1,1-bis(hydroxymethyl)ethyl]-propionamide}. Preferred groups X include those enumerated above.


Receding contact angle measurements may be used to readily identify fluorochemical materials having particularly good anti-staining properties, without having to conduct lengthy staining tests on fluorochemical emulsion-treated leather substrates. For the purposes of the present invention, fluorochemical oligomers having a receding

contact angle to n-hexadecane of at least about 30°, preferably greater than about 40°, and more preferably at least about 50° may exhibit particularly good anti-oil staining properties.

- 5           The fluorochemical compounds of Formulas III and V can be prepared by oligomerization of an unsaturated, fluorinated compound (VII) in the presence of a free-radical initiator and chain-transfer agent of the formula L(SH)<sub>m</sub> (m=1-4) according to the following Scheme (where m = 1):

Scheme 1


10

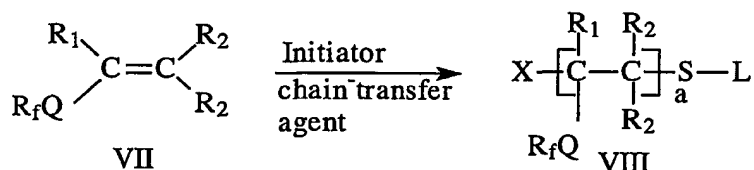

15

The fluorochemical compounds of Formulas IV and VI can be prepared by oligomerization of an unsaturated compound having a fluorinated aliphatic pendent group (VII) and an unsaturated compound having a fluorine-free aliphatic pendent group (IX) in the presence of a free-radical initiator and chain-transfer agent of the formula L(SH)<sub>m</sub> (for m=1) according to the following Scheme:

Scheme 2

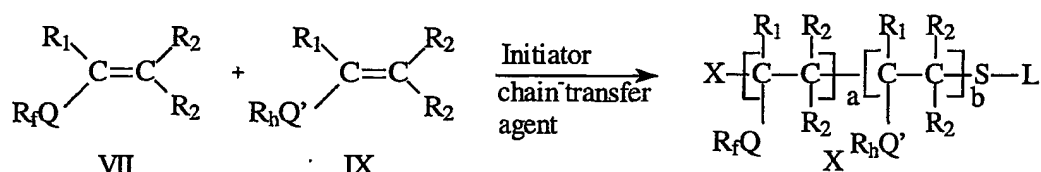


20

The moiety "L" corresponds to the linking group moiety L of Formula V or VI.

When the chain-transfer agent contains more than one sulfhydryl group, multiple fluoroaliphatic groups A may be linked through linking groups L to one or more aliphatic

R groups. For examples, when the chain transfer agent contains two sulfhydryl groups, two fluoroaliphatic groups A may be linked to L as follows:

5 Scheme 3

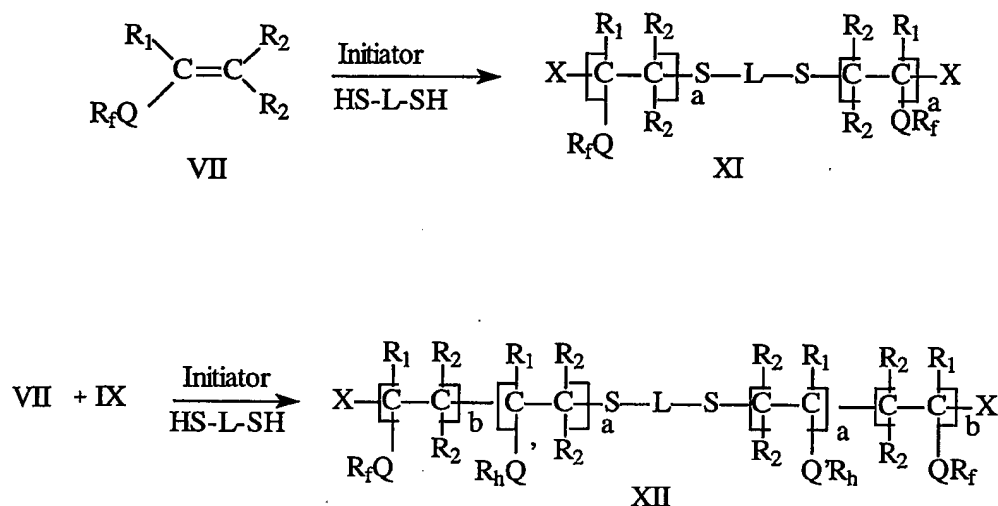

10 Compounds of Formula (VII) and methods for the preparation thereof are known and disclosed, e.g., in U.S. Pat. Nos. 2,803,615 (Ahlbrecht et al.) and 2,841,573 (Ahlbrecht et al.) which disclosures are incorporated herein by reference. Examples of such compounds include general classes of fluorochemical monomers such as acrylates, methacrylates, vinyl ethers, and allyl compounds containing fluorinated sulfonamido groups, acrylates or methacrylates derived from fluorochemical telomer alcohols, 15 fluorochemical thiols, and the like. Preferred compounds of Formula VII include N-methyl perfluorobutanesulfonamidoethyl(meth) acrylate, N-methyl perfluorooctanesulfonamidoethyl methacrylate, N-ethyl perfluorooctanesulfonamidoethyl acrylate, N-ethyl perfluorohexylsulfonamidoethyl methacrylate, the reaction product of isocyanatoethyl methacrylate and N-methylperfluorooctanesulfonamidoethyl alcohol, 1,1- 20 dihydroperfluorooctyl acrylate, N-methyl perfluorooctanesulfonamidoethyl vinyl ether,  $\text{C}_4\text{F}_9\text{SO}_2\text{NHCH}_2\text{CH}=\text{CH}_2$ , and others such as perfluorocyclohexyl acrylate ( $\text{C}_6\text{F}_{11}\text{CH}_2\text{OCOCH}=\text{CH}_2$ ), and tetrameric hexafluoropropyleneoxide dihydroacrylate.

Compounds of Formula IX may be selected from alkyl acrylate esters, vinyl acetate, styrene, alkyl vinyl ethers, alkyl methacrylate esters, acrylic acid, methacrylic acid, acrylamide, methacrylamide, acrylonitrile, methacrylonitrile, and N-vinylpyrrolidone. Alkyl acrylate ester monomers useful in the invention include straight-chain, cyclic, and branched-chain isomers of alkyl esters containing C<sub>1</sub> – C<sub>50</sub> alkyl groups. Useful specific examples of alkyl acrylate esters include: methyl acrylate, ethyl acrylate, n-propyl acrylate, 2-butyl acrylate, iso-amyl acrylate, n-hexyl acrylate, heptyl acrylate, n-octyl acrylate, iso-octyl acrylate, 2-ethylhexyl acrylate, nonyl acrylate, decyl acrylate, undecyl acrylate, dodecyl acrylate, tridecyl acrylate, and tetradecyl acrylate.

When the chain transfer agent L(SH)<sub>m</sub> bears a functional group, a compound of Formula VIII (Scheme I) or Formula X (Scheme 2) may be further reacted with a functional aliphatic compound to form the linking group L and incorporate the R group into the compounds of Formulas I, II and V or VI. The nature of the functional groups on both the chain transfer agent and the aliphatic compounds are chosen so that they are reactive toward one another to form the L linking group. Examples of mutually reactive pairs include an acyl group (such as a carboxylic acid, acyl halide or ester) reacting with an alcohol or amine, an alcohol or an amine reacting with a “leaving group” such as a halide or tosylate, and an isocyanate reacting with an alcohol or amine.

A compound of Formulas VIII or X may be provided with functional groups on the L linking group (in addition to the sulfhydryl group(s)) through the use of an appropriate functionalized chain-transfer agent L(SH)<sub>m</sub>, wherein L contains a functional group. Suitable functional groups for inclusion in the chain-transfer agent include hydroxy, amino, halo, epoxy, haloformyl, aziridinyl, acid groups and salts thereof, which react with an electrophile or nucleophile, or are capable of further transformation into such groups. The use of a functionalized chain-transfer agent allows for subsequent incorporation of the “R” group of Formulas I and II, and V or VI. For example, the “L” group of the chain transfer agent may be substituted with an electrophilic ester moiety. This ester moiety will allow incorporation of a “R” group by further reaction with an aliphatic alcohol having a nucleophilic hydroxyl group. Reaction between the two moieties produces an ester linkage, thereby linking the fluorochemical oligomeric moiety A with the aliphatic moiety



R. Alternatively, for example, the L moiety may be substituted with a hydroxyl group that may be reacted with an aliphatic ester to link the fluorochemical oligomeric moiety A with the aliphatic moiety R.

5           Examples of such functionalized chain transfer agents include 2-mercaptoethanol, mercaptoacetic acid, 2-mercaptobenzimidazole, 2-mercaptobenzoic acid, 2-mercaptobenzothiazole, 2-mercaptobenzoxazole, 3-mercapto-2-butanol, 2-mercaptosulfonic acid, 2-mercaptonicotinic acid, 4-hydroxythiopheno3-mercapto-1,2-propanediol, 1-mercapto-2-propanol, 2-mercaptopropionic acid, N-(2-  
10   mercaptopropionyl)glycine, 3-mercaptopropyltrimethoxysilane, 2-mercaptopyridine, 2-mercaptopyridine-N-oxide, 2-mercaptopyridinol, mercaptosuccinic acid, 2,3-mercaptopropanesulfonic acid, 2,3-dimercaptopropanol, 2,3-dimercaptosuccinic acid, cystine, cystine hydrochloride, cystine ethylester. Preferred functionalized chain-transfer agents include 2-mercaptoethanol, 3-mercapto-1,2-propanediol, 4-mercaptobutanol, 11-  
15   mercaptoundecanol, mercaptoacetic acid, 3-mercaptopropionic acid, 12-mercaptododecanoic acid, 2-mercaptoethylamine, 1-chloro-6-mercapto-4-oxahexan-2-ol, 2,3-dimercaptosuccinic acid, 2,3-dimercaptopropanol, 3-mercaptopropyltrimethoxysilane, 2-chloroethanethiol, 2-amino-3-mercaptopropionic acid, and compounds such as the adduct of 2-mercaptoethylamine and caprolactam.

20

          Advantageously, the R group of Formulas I, II, V or VI may be incorporated by use of a non-functional chain transfer agents. Non-functionalized chain-transfer agents are those that contain a group capable of terminating a radical chain reaction (e.g., a  
25   sulfhydryl) but no further functional groups capable of reacting with nucleophiles, electrophiles, or capable of undergoing displacement reactions. In such cases, the aliphatic portion of  $L(SH)_n$  provides the aliphatic group R of Formulas I, II and V or VI. Such compounds include mono, di, and polythiols such as ethanethiol, propanethiol, butanethiol, hexanethiol, n-octylthiol, t-dodecylthiol, 2-mercaptoethyl ether, 2-mercaptoimidazole, 2-mercaptoethylsulfide, 2-mercaptoimidazole, 8-mercaptomenthone,  
30   2,5-dimercapto-1,3,4-thiadiazole, 3,4-toluenedithiol, o-, m-, and p-thiocresol, ethylcyclohexanedithiol, p-menthane-2,9-dithiol, 1,2-ethanedithiol, 2-mercaptopyrimidine, and the like.

Whether functionalized or not, a chain transfer agent is present in an amount sufficient to control the number of polymerized monomer units in the oligomer. The end-capping agent is generally used in an amount of about 0.05 to about 0.5 equivalents, preferably about 0.25 equivalents, per equivalent of olefinic monomers VII and/or IX.

Also present in oligomerization process is a free-radical initiator as defined above in connection with X. Such compounds are known to those skilled in the art and include persulfates, azo compounds such as azoisobutyronitrile and azo-2-cyanovaleric acid and the like, hydroperoxides such as cumene, t-butyl, and t-amyl hydroperoxide, dialkyl peroxides such as di-t-butyl and dicumyl peroxide, peroxyesters such as t-butyl perbenzoate and di-t-butylperoxy phthalate, diacylperoxides such as benzoyl peroxide and lauroyl peroxide.

The initiating radical formed by an initiator can be incorporated into the fluorochemical oligomer to varying degrees depending on the type and amount of initiator used. A suitable amount of initiator depends on the particular initiator and other reactants being used. About 0.1 percent to about 5 percent, preferably about 0.1 percent, to about 0.8 percent, and most preferably about 0.2 percent to 0.5 percent by weight of an initiator can be used, based on the total weight of all other reactants in the reaction.

The oligomerization reaction of Schemes 1, 2 and 3 can be carried out in any solvent suitable for organic free-radical reactions. The reactants can be present in the solvent at any suitable concentration, e.g., from about 5 percent to about 90 percent by weight based on the total weight of the reaction mixture. Examples of suitable solvents include aliphatic and alicyclic hydrocarbons (e.g., hexane, heptane, cyclohexane), aromatic solvents (e.g., benzene, toluene, xylene), ethers (e.g., diethylether, glyme, diglyme, diisopropyl ether), esters (e.g., ethyl acetate, butyl acetate), alcohols (e.g., ethanol, isopropyl alcohol), ketones (e.g., acetone, methyl ethyl ketone, methyl isobutyl ketone), sulfoxides (e.g., dimethyl sulfoxide), amides (e.g., N,N-dimethylformamide, N,N-dimethylacetamide), halogenated solvents such as methylchloroform, FREON<sup>TM</sup> 113,

trichloroethylene,  $\alpha,\alpha,\alpha$ -trifluorotoluene, fluorinated ethers such as  $C_4F_9OCH_3$  and the like, and mixtures thereof.

The oligomerization can be carried out at any temperature suitable for conducting an organic free-radical reaction. Particular temperature and solvents for use can be easily selected by those skilled in the art based on considerations such as the solubility of reagents, the temperature required for the use of a particular initiator, and the like. While it is not practical to enumerate a particular temperature suitable for all initiators and all solvents, generally suitable temperatures are between about 30°C. and about 200°C.

Useful fibrous substrates which may be topically treated (surface treated) include natural textiles and fabrics such as cotton or wool and synthetic fabrics or textiles such as polyester or nylon, as well as paper and leather. Topical treatment can be done via immersion, spray, foam, kiss roll and metering. For example, the substrate can be immersed in a dispersion or solution of the fluorochemical oligomer and agitated until it is saturated. The saturated substrate can then be run through a padder/roller to remove excess dispersion, dried in an oven at a relatively low temperature (e.g., 70° C.) for a time sufficient to remove the dispersion medium (e.g. solvents such as those used in the oligomerization reaction), and cured at a temperature and for a time sufficient to provide a cured treated substrate. This curing process can be carried out at temperatures between ambient temperature and about 150° C. depending on the particular composition used. In general, a temperature of about 40 to 150° C. for a period of about 10 minutes is suitable. The cured treated substrate can be cooled to room temperature and used as desired, e.g., incorporated or fashioned into a garment such as rainwear.

A fluorochemical oligomer in connection with the present invention may be used as an aqueous composition, in particular an aqueous dispersion in water. If the oligomer is made by solution polymerization, it can be dispersed in water, through vigorously mixing of the solution oligomer with water. A solvent free dispersion can be obtained by subsequent distillation of the oligomerization solvent. In accordance with a preferred method of treating leather in connection with this invention, a leather such as a tanned hide is contacted with an aqueous composition,. Aqueous dispersions in accordance with

the invention are suitable for the treatment of all conventional tanned hides, in particular hides tanned with mineral tanning agents, such as chromium(III), aluminum or zirconium salts. The tanned hides are usually neutralized before treatment, and may be dyed before treatment. However, dyeing may also be carried out after the treatment in accordance with this invention.

The tanned hides can be treated with an aqueous dispersion comprising an oligomer in accordance with the invention preferably in an aqueous liquor obtained by diluting the oligomeric dispersions with water, at a pH of from 3 to 10, preferably from 5 to 8, and at from 20°C to 70°C, preferably from 40°C to 60°C. The amount of the oligomer dispersion applied to the leather in accordance with this invention is chosen so that sufficiently high or desirable water repellency is imparted to the substrate, said amount usually being between 0.1% and 30% by weight, preferably between 0.5% and 15% by weight, based on the shaved weight of the leather or the wet weight of the hide or wet blue leather. The amount which is sufficient to impart desired repellency can be determined empirically and can be increased as necessary or desired. The treatment is effected, for example, by drumming. After the treatment with the aqueous dispersion described above, the pH of the treatment liquor is preferably brought to 3-5, preferably 3.3-4, by addition of an acid in particular an organic acid, such as formic acid.

The amount of the fluorochemical composition applied to a substrate in accordance with this invention is chosen so that sufficiently high or desirable water and oil repellencies are imparted to the substrate surface, said amount usually being such that 0.01% to 5% by weight, preferably 0.05 to 2% by weight, of fluorine is present on the treated substrate. The amount which is sufficient to impart desired repellency can be determined empirically and can be increased as necessary or desired.

To prepare the aqueous dispersions, the oligomers, together with cationic or anionic and, if appropriate, nonionic dispersing and/or emulsifying or surfactant agents and, if appropriate, other auxiliaries and solvents, are vigorously dispersed in water, a relatively large amount of energy being supplied. To facilitate the preparation of the dispersion, the oligomer product may be dissolved first in solvent or mixture of solvents,

and the dispersion is advantageously carried out in two separate steps, predispersion being carried out first, followed by fine dispersion. Predispersion can also be carried out by using high shearing forces, for example by using a high-speed stirrer, such as a dispersing machine of the Ultraturax<sup>TM</sup> type, and the predispersion thereby obtained is then  
5 subjected, for example, to ultrasonic treatment or treatment in a high pressure homogenizer. After this treatment, the particle size in the dispersion generally will be equal to or less than 1 ( $\mu$ )m to the extent of more than 80%, preferably to the extent of more than 95%. Generally, the aqueous dispersion as a concentrate contains 5 to 50% by weight of an active composition (oligomers), 0.5 to 15% by weight of one or more  
10 dispersing and/or emulsifying agents, and 0 to 30% by weight of a solvent or solvent mixture, the remainder being water. Solventless dispersions can be prepared by removing the solvent by distillation.

Mixtures of water-insoluble solvents with water-soluble solvents can be employed  
15 as the solvent for preparation of the dispersion, the amount of the water-insoluble solvent in most cases being greater than the water-soluble solvent. Suitable water-soluble solvents are, for example, mono- or di-alcohols, lower ketones, polyglycol esters, and polyglycol ethers, or mixtures of such solvents. Examples of water-insoluble solvents are esters, ethers, and higher ketones. Low-boiling solvent portions can be removed by, for example,  
20 distillation, at a later time, if desired. Preferred water-insoluble solvents are esters or ketones, such as ethyl acetate, butyl acetate, and methyl ethyl ketone.

In order to increase repellency properties and the durability thereof and to aid in the application of an aqueous composition according to the present invention to a leather  
25 substrate to be treated therewith, it may be advantageous to incorporate into an aqueous composition according to this invention, one or more other substances such as oil and/or water repellent compositions and/or siloxane softening agents. Also other additives such as conventional leather finishing agents e.g. retanning, fatliquoring agents can be added.

30 Further suitable water and/or oil repellent composition that can be used in connection with this invention comprise polysiloxanes having fluoroaliphatic- and carboxyl-containing terminal groups as disclosed in WO 94/12561, fluoro- and

polysiloxane- containing urethanes as disclosed in EP 298364, carboxyl group containing polysiloxanes as disclosed in EP 324345. Still further water and/or oil repellent compositions are disclosed in US-patents 4.525.305, 4.920.190, 4.782.175, 4.778. 915, 4.539.006, 3.923.715 and 4.709.074.

5

This invention is illustrated by, but is not intended to be limited to, the following examples. Unless otherwise specified, all percentages shown in the examples and test methods which follow are percentages by weight.

## 10 EXAMPLES

Unless otherwise specified, all percentages shown in the examples and test methods which follow are percentages by weight.

### Glossary

15 **MeFBSE** -  $C_4F_9SO_2N(CH_3)CH_2CH_2OH$ , can be prepared using the general procedure described in Example 3 of U.S. Pat. No. 2,803,656.

**MeFOSE** -  $C_8F_{17}SO_2N(CH_3)CH_2CH_2OH$ , can be prepared using the general procedure described in Example 3 of U.S. Pat. No. 2,803,656.

20 **AC600** - FLUOWET™ AC600,  $C_6F_{13}C_2H_4OC(O)CH=CH_2$ , available from Clariant GmbH, Germany.

**MeFBSEMA** -  $C_4F_9SO_2N(CH_3)C_2H_4OC(O)C(CH_3)=CH_2$ , can be prepared from MeFBSE and methacryloyl chloride (available from Aldrich Chemical Co.) using the general procedure described in U.S. Pat. No. 2,803,615.

25 **MeFBSEA** -  $C_4F_9SO_2N(CH_3)CH_2CH_2OC(O)CH=CH_2$ , can be prepared from MeFBSE and acryloyl chloride (available from Aldrich Chemical Co.) using the general procedure described in U.S. Pat. No. 2,803,615.

**MeFOSEA** -  $C_8F_{17}SO_2N(CH_3)CH_2CH_2OC(O)CH=CH_2$ , can be prepared from MeFOSE and acryloyl chloride using the general procedure described in U.S. Pat. No. 2,803,615.

30 **FC-3573** - SCOTCHGARD™ Leather Protector, 30% active solids emulsion containing a fluorochemical ester, available from 3M Company, St. Paul, MN.

**$C_{18}H_{37}OH$**  - 1-octadecanol, available from Aldrich Chemical Co.

**C<sub>17</sub>H<sub>35</sub>COOH** - stearic acid, available from Aldrich Chemical Co.

**C<sub>21</sub>H<sub>43</sub>COOH** - behenic (docosenoic) acid, available from Aldrich Chemical Co.

**UNILIN™ 700** - polyethylene 700 alcohol (having around 50 carbon atoms), available from Baker Petrolite Corp., Tulsa, Oklahoma.

5        **UNICID™ 700** - polyethylene 700 acid (having around 50 carbon atoms), available from Petrolite Corp., St. Louis, Missouri.

**EMPOL™ 1008** - distilled and hydrogenated dimer acid made from oleic acid, having an acid equivalent weight of 305 as determined by titration, available from Henkel Corp./Emery Group, Cincinnati, Ohio.

10        **ODA** - octadecyl acrylate, C<sub>18</sub>H<sub>37</sub>OC(O)CH=CH<sub>2</sub>, available from Aldrich Chemical Co.

**ODMA** - octadecyl methacrylate, C<sub>18</sub>H<sub>37</sub>OC(O)C(CH<sub>3</sub>)=CH<sub>2</sub>, available from Sartomer Co., Exton, PA.

**LA** - lauryl acrylate, C<sub>12</sub>H<sub>25</sub>OC(O)CH=CH<sub>2</sub>, available from Aldrich Chemical Co.

15        **LMA** - lauryl methacrylate, C<sub>12</sub>H<sub>25</sub>OC(O)C(CH<sub>3</sub>)=CH<sub>2</sub>, available from Aldrich Chemical Co.

**BA** - butyl acrylate, CH<sub>3</sub>CH<sub>2</sub>CH<sub>2</sub>CH<sub>2</sub>OC(O)CH=CH<sub>2</sub>, available from Aldrich Chemical Co.

20        **BMA** - butylmethacrylate, CH<sub>3</sub>CH<sub>2</sub>CH<sub>2</sub>CH<sub>2</sub>OC(O)C(CH<sub>3</sub>)=CH<sub>2</sub>, available from Aldrich Chemical Co.

**i-BA** - *iso*-butyl acrylate, CH<sub>3</sub>CH<sub>2</sub>CH(CH<sub>3</sub>)OC(O)CH=CH<sub>2</sub>, available from Aldrich Chemical Co.

**EHA** - ethylhexyl acrylate, CH<sub>3</sub>CH<sub>2</sub>CH<sub>2</sub>CH<sub>2</sub>CH(C<sub>2</sub>H<sub>5</sub>)CH<sub>2</sub>OC(O)CH=CH<sub>2</sub>, available from Aldrich Chemical Co.

25        **EHMA** - ethylhexyl methacrylate  
CH<sub>3</sub>CH<sub>2</sub>CH<sub>2</sub>CH<sub>2</sub>CH(C<sub>2</sub>H<sub>5</sub>)CH<sub>2</sub>OC(O)C(CH<sub>3</sub>)=CH<sub>2</sub>, available from Aldrich Chemical Co.

**MA** - methyl acrylate, CH<sub>3</sub>OC(O)CH=CH<sub>2</sub>, available from Aldrich Chemical Co.

**MMA** - methyl methacrylate, CH<sub>3</sub>OC(O)C(CH<sub>3</sub>)=CH<sub>2</sub>, available from Aldrich Chemical Co.

30        **UNILIN™ 700A** - To a three necked round bottom flask equipped with a mechanical stirrer and a Dean-Stark apparatus was added 200 g (0.231 mol) of UNILIN™ 700, 16.7 g (0.231 mol) of acrylic acid, 2 g of methanesulfonic acid and 400 mL of

toluene. The resulting mixture was heated to reflux for approximately 15 hours, during which time water had collected in the Dean-Stark apparatus. IR of the reaction product showed no -COOH and -OH peaks, indicating that the ester formation was complete. To the hot ester solution was slowly added 10 g of  $\text{Ca}(\text{OH})_2$  while stirring. and then hot  
5 filtered. The resulting mixture was filtered hot, the toluene was removed from the filtrate by heating under reduced pressure, and the remaining wet solid was dried in a vacuum oven. Also available as X-8503™ from Baker-Petrolite, Tulsa, OK.

**methyl 3-mercaptopropionate** -  $\text{HSCH}_2\text{CH}_2\text{COOCH}_3$ , available from Aldrich Chemical Co.

10 **2-mercaptoethanol** -  $\text{HSCH}_2\text{CH}_2\text{OH}$ , available from Aldrich Chemical Co.

**3-mercaptopropanediol** -  $\text{HSCH}_2\text{CH}(\text{OH})\text{CH}_2\text{OH}$ , available from Aldrich Chemical Co.

***n*-OSH** - *n*-octyl mercaptan,  $\text{C}_8\text{H}_{17}\text{SH}$ , available from Aldrich Chemical Co.

**ODSH** - octadecyl mercaptan,  $\text{C}_{18}\text{H}_{37}\text{SH}$ , available from Aldrich Chemical Co.

15 **DDSH** - dodecyl mercaptan,  $\text{C}_{12}\text{H}_{25}\text{SH}$ , available from Aldrich Chemical Co.

**AIBN** - 2,2'-azobisisobutyronitrile, available as VAZO™ 64 initiator from E. I. duPont de Nemours & Co., Wilmington, Delaware.

**LP** - lauroyl peroxide,  $[\text{CH}_3(\text{CH}_2)_{10}\text{CO}]_2\text{O}_2$ , available from Aldrich Chemical Co.

20 **VAZO 88™** - 1,1'-azobiscyclohexylnitrile initiator from E. I. duPont de Nemours & Co., Wilmington, Delaware.

### **Preparation of Fluorochemical Compounds and Intermediates**

**(MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH** - To a round bottom flask equipped with stirrer,  
25 thermometer, reflux condenser and nitrogen bubbler was added 1695 g (4.124 mol) of MeFBSEA monomer and 1500 g of ethyl acetate, and nitrogen was bubbled through the resulting solution for a period of 15 minutes. To the solution was then added 80.6 g (1.031 mol) of 2-mercaptoethanol, and nitrogen was bubbled for an additional 2 minutes. AIBN initiator (0.5 wt %) was added and the resulting mixture heated to 65°C for  
30 approximately 15 hours under nitrogen atmosphere. IR analysis of the resulting oligomer showed the absence of a  $\text{>C=C<}$  peak at  $1637\text{ cm}^{-1}$  indicating no residual monomer. The ethyl acetate was evaporated under vacuum to give the desired oligomeric alcohol.



(MeFBSEA)<sub>2</sub>SC<sub>18</sub>H<sub>37</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 2.0 mole equivalents (573.1 g) of ODSH and AIBN was replaced with LP (0.5 wt %).

5

(MeFBSEA)<sub>4</sub> SC<sub>18</sub>H<sub>37</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 1.0 mole equivalent (286.6 g) of ODSH and AIBN was replaced with LP (0.5 wt %).

10

(MeFBSEA)<sub>6</sub> SC<sub>18</sub>H<sub>37</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 0.66 mole equivalent (189.2 g) of ODSH and AIBN was replaced with LP (0.5 wt %).

15

(MeFBSEA)<sub>8</sub> SC<sub>18</sub>H<sub>37</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 0.5 mole equivalent (143.3 g) of ODSH and AIBN was replaced with LP (0.5 wt %).

20

(MeFBSEA)<sub>12</sub> SC<sub>18</sub>H<sub>37</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 0.33 mole equivalent (94.6 g) of ODSH and AIBN was replaced with LP (0.5 wt %).

25

(MeFBSEA)<sub>20</sub> SC<sub>18</sub>H<sub>37</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 0.2 mole equivalent (57.3 g) of ODSH and AIBN was replaced with LP (0.5 wt %).

30

(MeFBSEA)<sub>2</sub>SC<sub>8</sub>H<sub>17</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 2.0 mole equivalents (292.6 g) of *n*-OSH and AIBN was replaced with LP (0.5 wt %).

(MeFBSEA)<sub>4</sub> SC<sub>8</sub>H<sub>17</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 1.0 mole equivalent (146.3 g) of *n*-OSH and AIBN was replaced with LP (0.5 wt %).

(MeFBSEA)<sub>6</sub> SC<sub>8</sub>H<sub>17</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 0.66 mole equivalent (96.6 g) of *n*-OSH and AIBN was replaced with LP (0.5 wt %).

5

(MeFBSEA)<sub>8</sub> SC<sub>8</sub>H<sub>17</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 0.5 mole equivalent (73.2 g) of *n*-OSH and AIBN was replaced with LP (0.5 wt %).

10

(MeFBSEA)<sub>12</sub> SC<sub>8</sub>H<sub>17</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 0.33 mole equivalent (48.3 g) of *n*-OSH and AIBN was replaced with LP (0.5 wt %):

15

(MeFBSEA)<sub>20</sub> SC<sub>8</sub>H<sub>17</sub> - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that 2-mercaptoethanol was replaced with a 0.2 mole equivalent (29.3 g) of *n*-OSH and AIBN was replaced with LP (0.5 wt %):

(MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH - To a round bottom flask equipped with stirrer, thermometer, reflux condenser and nitrogen bubbler was added 501 g (1.179 mol) of MeFBSEMA and 500 mL of ethyl acetate. The contents of the flask were stirred to form a solution, and nitrogen was bubbled through the solution for 15 minutes. To this solution was then added 23.03 g (0.295 mol) of 2-mercaptoethanol, and nitrogen was bubbled through the contents of the flask for an additional 2 minutes. 0.5% by weight of AIBN was added and the resulting mixture heated to 65°C for approximately 15 hours under a nitrogen atmosphere. IR spectra of this material showed the absence of a >C=C< peak at 1637 cm<sup>-1</sup>, indicating no residual monomer present. The polymer solution was poured in hexanes, causing the polymer to precipitate as a viscous liquid, which was removed by decantation and dried under vacuum.

30

(AC600)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH - Essentially the same procedure was followed as for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH except that the MeFBSEA was replaced with an equimolar amount of AC600.

(MeFOSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH - To a round bottom flask equipped with stirrer, thermometer, reflux condenser and nitrogen bubbler was added 400 g (0.655 mol) of MeFOSEA and 400 mL of ethyl acetate. While stirring, nitrogen was bubbled through the resulting solution for 15 minutes. To this solution was added 17.7 g (0.164 mol) of 3-mercapto-1,2-propanediol, and bubbling with nitrogen was continued for another 2 minutes. 0.5% (wt) of AIBN was added and the mixture was heated to 65°C for about 15 hours under a nitrogen atmosphere. IR spectra of this material showed the absence of >C=C< peak at 1637 cm<sup>-1</sup>, indicating no residual monomer. This mixture was poured in CH<sub>3</sub>OH and the resulting white powder was filtered and dried under vacuum.

(MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH - Essentially the same procedure was followed as for preparing (MeFOSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH except that the MeFOSEA was replaced with an equimolar amount of MeFBSEMA.

15

(MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH - Essentially the same procedure was followed as for preparing (MeFOSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH except that the MeFOSEA was replaced with an equimolar amount of MeFBSEA.

(MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH - Essentially the same procedure was followed as for preparing (MeFOSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH except that the MeFOSEA was replaced with an equimolar amount of MeFBSEMA.

(MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub> - To a three necked round bottom flask equipped with a mechanical stirrer and a dean-stark apparatus was added 150 g (0.0871 mol) of (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH, 24.8 g (0.0871 mol) of stearic acid, 1% of p-toluene sulfonic acid (based on solids) and 200 mL of toluene. The resulting mixture was then heated to reflux for approximately 15 hours, with 1.6 mL of water collecting in the dean-stark apparatus. IR analysis of the reaction product showed no residual -COOH and -OH peaks, indicating complete esterification. To the hot reaction product was slowly added 10 g of Ca(OH)<sub>2</sub> while stirring, then the mixture was filtered to remove the solids. The

25

30

toluene was removed from the filtrate using rotary evaporation and the resulting solid was dried in a vacuum oven.

**Emulsification Procedure:** 100 g of the above material was dissolved in 100 g of hot ethyl acetate. To this solution while stirring was added a mixture of 400 g of deionized water and 5 g of SIPONATE™ DS-10 (sodium dodecylbenzenesulfonate, available from Rhone-Poulenc, Inc, Cranbury, NJ), with the mixture heated to 70°C. While stirring, the resulting mixture was sonicated for 6 minutes, then 24 g of ethylene glycol was mixed in. The ethyl acetate was evaporated under vacuum to provide a stable emulsion having 19.3% solids.

**(MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>** - This ester was prepared using essentially the same procedure as described for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>, except that the (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH was replaced with an equimolar amount of (MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH. Also, the same emulsification procedure was followed (to give an 18.5% solids emulsion).

**(AC600)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>** - This ester was prepared using essentially the same procedure as described for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>, except that the (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH was replaced with an equimolar amount of (AC600)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH.

**(MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>21</sub>H<sub>43</sub>** - This ester was prepared using essentially the same procedure as described for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>, except that the C<sub>17</sub>H<sub>35</sub>COOH was replaced with an equimolar amount of C<sub>21</sub>H<sub>43</sub>COOH.

**(MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>21</sub>H<sub>43</sub>** - This ester was prepared using essentially the same procedure as described for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>, except that the C<sub>17</sub>H<sub>35</sub>COOH was replaced with an equimolar amount of C<sub>21</sub>H<sub>43</sub>COOH and the (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH was replaced with an equimolar amount of (MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH.

(MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOC-UNICID™ 700 - This ester was prepared using essentially the same procedure as described for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>, except that the C<sub>17</sub>H<sub>35</sub>COOH was replaced with an equimolar amount of UNICID™ 700.

5

(MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOC-UNICID™ 700 - This ester was prepared using essentially the same procedure as described for preparing (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>, except that the C<sub>17</sub>H<sub>35</sub>COOH was replaced with an equimolar amount of UNICID™ 700 and the (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH was replaced with an

10

(MeFOSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OOCC<sub>17</sub>H<sub>35</sub>)CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub> - To a 3-necked round bottom flask equipped with a mechanical stirrer and Dean-Stark apparatus was added 50 g (0.0196 mol) of (MeFOSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH, 11.2 g (0.0392 mol) of stearic acid, 0.5 mL of methanesulfonic acid and 100 mL of toluene. The resulting mixture was heated to reflux for approximately 15 hours, during which time some water had collected in the Dean-Stark apparatus. IR spectra of this mixture showed no -COOH or -OH peaks. To this hot mixture 10 g of Ca(OH)<sub>2</sub> was added slowly with stirring, and the hot solution was filtered. Toluene was removed from the filtrate by heating under reduced pressure, and the remaining solids were dried in a vacuum oven.

15

20

(MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OOCC<sub>17</sub>H<sub>35</sub>)CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub> - This ester was prepared using essentially the same procedure as described for preparing (MeFOSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OOCC<sub>17</sub>H<sub>35</sub>)CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>, except that the (MeFOSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH was replaced with an equimolar amount of (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH.

25

(MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH(OOCC<sub>17</sub>H<sub>35</sub>)CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub> - This ester was prepared using essentially the same procedure as described for preparing (MeFOSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OOCC<sub>17</sub>H<sub>35</sub>)CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>, except that the (MeFOSEA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH was replaced with an equimolar amount of (MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH(OH)CH<sub>2</sub>OH.

30

**2MeFOSE-EMPOL™ 1008** - To a 500 mL 2-necked round-bottom flask equipped with overhead condenser, thermometer and Dean-Stark trap wrapped with heat tape was charged 57.8 g (0.190 eq) of Empol™ 1008 dimer acid, 100 g (0.185 eq) of MeFOSE, 1 g of *p*-toluenesulfonic acid and 50 g of toluene. The resulting mixture was placed in an oil bath heated to 150°C. The degree of esterification was monitored by measuring the amount of water collected in the Dean-Stark trap and also by using gas chromatography to determine the amount of unreacted fluorochemical alcohol. After 18 hours of reaction, about 2.8 mL of water was collected and a negligible amount of fluorochemical alcohol remained, indicating a complete reaction. The reaction mixture was then cooled to 100°C and was twice washed with 120 g aliquots of deionized water to a water pH of 3. The final wash was removed from the flask by suction, and the reaction mixture was heated to 120°C at an absolute pressure of about 90 torr to remove volatiles. The product, a brownish solid, was characterized as containing the desired product by <sup>1</sup>H and <sup>13</sup>C NMR spectroscopy and thermogravimetric analysis.

**[(MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOC]<sub>2</sub>-EMPOL™ 1008** - This ester was prepared using essentially the same procedure as described for preparing 2MeFOSE-EMPOL™ 1008, except that the MeFOSE was replaced with an equimolar amount of (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OH.

**MeFBSEMA / UNILIN™ 700A / HSCH<sub>2</sub>CH<sub>2</sub>COOCH<sub>3</sub> Copolymer (low molecular weight)** - To a round bottom flask equipped with stirrer, thermometer, reflux condenser and nitrogen bubbler was added 42.5 g (0.1 mol) of MeFBSEMA, 70 g of methyl isobutyl ketone, 18.8 g (0.025 mol) of UNILIN™ 700A (X-8503) and 3 g (0.025 mol) of methyl 3-mercaptopropionate. This mixture was heated to 100°C to obtain a homogenous solution. While stirring, nitrogen was bubbled through the resulting solution for 2 minutes. To this solution was added 0.25 g of VAZO™ 88, and the resulting mixture was heated to 98-100°C for about 15 hours under a nitrogen atmosphere with stirring. IR spectra of this material showed the absence of a >C=C< peak at 1637 cm<sup>-1</sup>, indicating no residual monomer. The solvent was evaporated under vacuum to recover the solid product.

**MeFBSEMA / UNILIN™ 700A Copolymer (high molecular weight)** – To a round bottom flask equipped with stirrer, thermometer, reflux condenser and nitrogen bubbler was added 42.5 g (0.1 mol) of MeFBSEMA, 70 g of methyl isobutyl ketone and 18.8 g (0.025 mol) of UNILIN™ 700A (X-8503). This mixture was heated to 100°C until a homogenous solution was obtained. While stirring, nitrogen was bubbled through the resulting solution for 2 minutes. To this solution was added 0.25 g of VAZO™ 88, and the resulting mixture was heated to 98-100°C for about 15 hours under a nitrogen atmosphere. IR spectra of this material showed the absence of  $>C=C<$  peak at  $1637\text{ cm}^{-1}$ , indicating no residual monomer. The solvent was evaporated under vacuum to recover the solid product.

**MeFBSEMA / ODA /  $\text{HSCH}_2\text{CH}_2\text{COOCH}_3$  Oligomer in the ratio of 4:1:1** - To a round bottom flask equipped with stirrer, thermometer, reflux condenser and nitrogen bubbler was added 42.5 g (0.1 mol) of MeFBSEMA, 60 g of ethyl acetate, 8.1 g (0.025 mol) of ODA and 3 g (0.025 mol) of methyl 3-mercaptopropionate. While stirring, nitrogen was bubbled through the resulting solution for 5 minutes. To this solution was added 0.25 g of AIBN and the resulting mixture was heated to 65°C for about 15 hours under a nitrogen atmosphere. IR spectra of this material showed the absence of  $>C=C<$  peak at  $1637\text{ cm}^{-1}$ , indicating no residual monomer. The solvent was evaporated under vacuum to recover the solid product.

**MeFBSEA / ODA / DDHS Oligomer in the ratio of 3:1:1** - To a round bottom flask equipped with stirrer, thermometer, reflux condenser and nitrogen bubbler was added 41.1 g (0.1 mol) of MeFBSEA, 60 g of ethyl acetate, 10.7 g (0.033 mol) of ODA and 6.7 g (0.033 mol) of DDSH. While stirring, nitrogen was bubbled through the resulting solution for 5 minutes. To this solution was added 0.25 g of LP and the resulting mixture was heated to 65°C for about 15 hours under a nitrogen atmosphere. IR spectra of this material showed the absence of  $>C=C<$  peak at  $1637\text{ cm}^{-1}$ , indicating no residual monomer. The solvent was evaporated under vacuum to recover the solid product.

**MeFBSEA/ *i*-ODA / DDSH Oligomer in the ratio of 3:1:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 3:1:1 except that ODA was replaced with an equimolar amount of *i*-ODA.

5        **MeFBSEA/ LA / DDSH Oligomer in the ratio of 3:1:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 3:1:1 except that ODA was replaced with an equimolar amount of LA.

10       **MeFBSEA/ EHA / DDSH Oligomer in the ratio of 3:1:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 3:1:1 except that ODA was replaced with an equimolar amount of EHA.

15       **MeFBSEA/ BA / DDSH Oligomer in the ratio of 3:1:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 3:1:1 except that ODA was replaced with an equimolar amount of BA.

20       **MeFBSEA/ *i*-BA / DDSH Oligomer in the ratio of 3:1:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 3:1:1 except that ODA was replaced with an equimolar amount of *i*-BA.

**MeFBSEA/ MA / DDSH Oligomer in the ratio of 3:1:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 3:1:1 except that ODA was replaced with an equimolar amount of MA.

25       **MeFBSEA / ODA / DDHS Oligomer in the ratio of 4:2:1** - To a round bottom flask equipped with stirrer, thermometer, reflux condenser and nitrogen bubbler was added 41.1 g (0.1 mol) of MeFBSEA, 60 g of ethyl acetate, 16.2 g (0.05 mol) of ODA and 5.0 g (0.025 mol) of DDSH. While stirring, nitrogen was bubbled through the resulting solution for 5 minutes. To this solution was added 0.25 g of LP and the resulting mixture was  
30       heated to 65°C for about 15 hours under a nitrogen atmosphere. IR spectra of this material showed the absence of >C=C< peak at 1637 cm<sup>-1</sup>, indicating no residual monomer. The solvent was evaporated under vacuum to recover the solid product.



**MeFBSEA/ *i*-ODA / DDSH Oligomer in the ratio of 4:2:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 4:2:1 except that ODA was replaced with an equimolar amount of *i*-ODA.

5

**MeFBSEA/ LA / DDSH Oligomer in the ratio of 4:2:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 4:2:1 except that ODA was replaced with an equimolar amount of LA.

10

**MeFBSEA/ EHA / DDSH Oligomer in the ratio of 4:2:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 4:2:1 except that ODA was replaced with an equimolar amount of EHA.

15

**MeFBSEA/ BA / DDSH Oligomer in the ratio of 4:2:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 4:2:1 except that ODA was replaced with an equimolar amount of BA.

20

**MeFBSEA/ *i*-BA / DDSH Oligomer in the ratio of 4:2:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 4:2:1 except that ODA was replaced with an equimolar amount of *i*-BA.

25

**MeFBSEA/ *i*-ODA / DDSH Oligomer in the ratio of 4:2:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODA / DDHS in the ratio of 4:2:1 except that ODA was replaced with an equimolar amount of *i*-ODA.

30

**MeFBSEA / ODMA / DDHS Oligomer in the ratio of 3:1:1** - To a round bottom flask equipped with stirrer, thermometer, reflux condenser and nitrogen bubbler was added 41.1 g (0.1 mol) of MeFBSEA, 60 g of ethyl acetate, 11.2 g (0.033 mol) of

ODMA and 6.7 g (0.033 mol) of DDSH. While stirring, nitrogen was bubbled through the resulting solution for 5 minutes. To this solution was added 0.25 g of LP and the resulting mixture was heated to 65°C for about 15 hours under a nitrogen atmosphere. IR spectra of this material showed the absence of  $>C=C<$  peak at  $1637\text{ cm}^{-1}$ , indicating no residual monomer. The solvent was evaporated under vacuum to recover the solid product.

**MeFBSEA/ LMA / DDSH Oligomer in the ratio of 3:1:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODMA / DDHS in the ratio of 3:1:1 except that ODMA was replaced with an equimolar amount of LMA.

**MeFBSEA/ EHMA / DDSH Oligomer in the ratio of 3:1:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODMA / DDHS in the ratio of 3:1:1 except that ODMA was replaced with an equimolar amount of EHMA.

**MeFBSEA/ BMA / DDSH Oligomer in the ratio of 3:1:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODMA / DDHS in the ratio of 3:1:1 except that ODMA was replaced with an equimolar amount of BMA.

**MeFBSEA/ *i*-BMA / DDSH Oligomer in the ratio of 3:1:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODMA / DDHS in the ratio of 3:1:1 except that ODMA was replaced with an equimolar amount of *i*-BMA.

**MeFBSEA/ MMA / DDSH Oligomer in the ratio of 3:1:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODMA / DDHS in the ratio of 3:1:1 except that ODMA was replaced with an equimolar amount of MMA.

**MeFBSEA / ODMA / DDHS Oligomer in the ratio of 4:2:1** - To a round bottom flask equipped with stirrer, thermometer, reflux condenser and nitrogen bubbler was added 41.1 g (0.1 mol) of MeFBSEA, 60 g of ethyl acetate, 16.9 g (0.05 mol) of ODMA and 5.0 g (0.025 mol) of DDSH. While stirring, nitrogen was bubbled through the resulting solution for 5 minutes. To this solution was added 0.25 g of LP and the resulting mixture was heated to 65°C for about 15 hours under a nitrogen atmosphere. IR spectra of

this material showed the absence of  $>C=C<$  peak at  $1637\text{ cm}^{-1}$ , indicating no residual monomer. The solvent was evaporated under vacuum to recover the solid product.

5        **MeFBSEA/ LMA / DDSH Oligomer in the ratio of 4:2:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODMA / DDHS in the ratio of 4:2:1 except that ODMA was replaced with an equimolar amount of LMA.

10       **MeFBSEA/ EHMA / DDSH Oligomer in the ratio of 4:2:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODMA / DDHS in the ratio of 4:2:1 except that ODMA was replaced with an equimolar amount of EHMA.

15       **MeFBSEA/ BMA / DDSH Oligomer in the ratio of 4:2:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODMA / DDHS in the ratio of 4:2:1 except that ODMA was replaced with an equimolar amount of BMA.

**MeFBSEA/ *i*-BMA / DDSH Oligomer in the ratio of 4:2:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODMA / DDHS in the ratio of 4:2:1 except that ODMA was replaced with an equimolar amount of *i*-BMA.

20       **MeFBSEA/ MMA / DDSH Oligomer in the ratio of 4:2:1** – Essentially the same procedure was followed as for preparing MeFBSEA / ODMA / DDHS in the ratio of 4:2:1 except that ODMA was replaced with an equimolar amount of MMA.

25       **MeFOSE-UNICID™ 700** - To a 1000 mL 3-necked round-bottom flask equipped with overhead condenser, thermometer and Dean-Stark trap wrapped with heat tape was charged 135 g (0.2424 mol) of MeFOSE, 215.7 g (0.2424 mol) of UNICID™ 700, 3.5 g of *p*-toluenesulfonic acid and 500 mL of toluene. The resulting mixture was then heated to reflux for approximately 15 hours. IR analysis of the reaction product showed no residual -COOH and -OH peaks, indicating complete esterification. To the hot reaction product was slowly added 10 g of  $\text{Ca}(\text{OH})_2$  while stirring, then the mixture was  
30       filtered to remove the solids. The toluene was removed from the filtrate using rotary evaporation and the resulting solid was dried in a vacuum oven.

**Test Methods**

**Water Repellency (WR)** - The water repellency of a treated substrate is measured using the following test. In this test, samples are challenged to penetrations by blends of deionized water and isopropyl alcohol (IPA). Each blend is assigned a rating number as shown below:

	<b>Water Repellency Rating Number</b>	<b>Water/IPA Blend (% by volume)</b>
10	0	100% water
	1	90/10 water/IPA
	2	80/20 water/IPA
	3	70/30 water/IPA
	4	60/40 water/IPA
15	5	50/50 water/IPA
	6	40/60 water/IPA
	7	30/70 water/IPA
	8	20/80 water/IPA
	9	10/90 water/IPA
20	10	100% IPA

In running the Water Repellency Test, a treated substrate is placed on a flat, horizontal surface. Five small drops of water or a water/IPA mixture are gently placed at points at least two inches apart on the sample. If, after observing for 15 seconds at a 45° angle, four of the five drops are visible as a sphere or a hemisphere, the nonwoven web sample is deemed to pass the test. The reported water repellency rating corresponds to the highest numbered water or water/IPA mixture for which the nonwoven sample passes the described test.

It is desirable to have a water repellency rating of at least 3.

**Oil Repellency (OR)** - The oil repellency of a treated substrate is measured using the following test. In this test, samples are challenged to penetration by oil or oil mixtures

of varying surface tensions. Oils and oil mixtures are given a rating corresponding to the following:

5	<u>Oil Repellency Rating Number</u>	<u>Oil Composition</u>
	0	(fails Kaydol™ mineral oil)
	1	Kaydol™ mineral oil
	2	65/35 (vol) mineral oil/n-hexadecane
	3	n-hexadecane
10	4	n-tetradecane
	5	n-dodecane
	6	n-decane
	7	n-octane
	8	n-heptane

15

The Oil Repellency Test is run in the same manner as is the Water Repellency Test, with the reported oil repellency rating corresponding to the highest oil or oil mixture for which the nonwoven web sample passes the test.

20

It is desirable to have an oil repellency rating of at least 1, preferably a rating of at least 3.

25

**Abraded Oil and Water Repellency** - The repellency of an abraded treated substrate was measured on 5 cm x 12.5 cm test pieces of treated substrate which had been abraded using 10 back-and-forth rubs over a 5-second period with abrasive paper ("WETORDRY-TRI-M-ITE" No. 600C) in an AATCC crockmeter (Model CM-1). The above-described OR and WR repellency tests were performed on the abraded test pieces and the repellency ratings recorded as Abraded Oil Repellency (AOR) and Abraded Water Repellency (AWR) values.

30

**Spray Rating (SR)** - The spray rating of a treated substrate is a value indicative of the dynamic repellency of the treated substrate to water that impinges on the treated substrate. The repellency is measured by Standard Test Number 22, published in the

1985 Technical Manual and Yearbook of the American Association of Textile Chemists and Colorists (AATCC), and is expressed in terms of "spray rating" of the tested substrate. The spray rating is obtained by spraying 250 mL water on the substrate from a distance of 15 cm. The wetting pattern is visually rated, using a 0 to 100 scale, where 0 means  
5 complete wetting and 100 means no wetting at all.

**Contact Angle Test Procedure** - The following procedure was used to measure both advancing and receding contact angles.

A sample of clean or nylon film is cut into 85 mm x 13 mm rectangular strips.  
10 Each strip is cleaned by dipping the strip in and out of methyl alcohol, wiping the strip with a Kimwipe™ wiper (commercially available from Kimberly-Clark Corp., Boswell, Georgia), taking care not to hand-touch the strip's surface, and allowing the strip to dry for 15 minutes. Then, using a small binder clip to hold one end of the strip, the strip is immersed in a treating solution consisting of a 3% (wt) solution of the alkylated  
15 fluorochemical oligomer compound in either 50/50 (wt)  $\alpha,\alpha,\alpha$ -trifluorotoluene/toluene, methyl isobutyl ketone, ethyl acetate or 50/50 (wt) ethylacetate/toluene (or mixtures thereof) and the strip is then withdrawn slowly and smoothly from the solution. The coated film strip is tilted to allow any solution run-off to accumulate at the corner of the strip, and a Kimwipe™ tissue is touched to the corner to pull away the solution buildup.  
20 The coated film strip is allowed to air dry in a protected location for a minimum of 30 minutes and then is baked for 10 minutes at 150°C to dry and cure the coating.

After the treatment is dry and cured, the advancing or receding contact angles of water and *n*-hexadecane are measured using a CAHN Dynamic Contact Angle Analyzer,  
25 Model DCA 322 (a Wilhelmy balance apparatus equipped with a computer for control and data processing, available from ATI, Madison, Wisconsin) using the following procedure. The CAHN Dynamic Contact Angle Analyzer is calibrated using a 500 mg weight. An alligator clip is fastened to a piece of coated film strip about 30 mm long, and the clip and film piece are hung from the stirrup of the balance. A 30 mL glass beaker  
30 containing approximately 25 mL of *n*-hexadecane is placed under the balance stirrup, and the beaker is positioned so that the coated film strip is centered over the beaker and its contents but not touching the walls of the beaker. Using the lever on the left side of the

apparatus, the platform supporting the beaker is carefully raised until the surface of the test liquid is 2-3 mm from the lower edge of the film strip. The door to the apparatus is closed, the "Configure" option is chosen from the "Initialize" menu of the computer, the "Automatic" option is chosen from the "Experiment" menu, and the computer program  
5 then calculates the time for a total of 3 scans. The result should be a time interval of 1 second and estimated total time of 5 minutes, which are the acceptable settings to show the baseline weight of the sample. The Return Key is then pressed to begin the automatic measurement cycle. Ten readings of the baseline are taken before the scan begins. The apparatus then raises and lowers the liquid so that 3 scans are taken. The "Least Squares"  
10 option is then selected from the "Analysis" menu, and the average advancing or receding contact angle is calculated from the 3 scans of the film sample. The 95% confidence interval for the average of the 3 scans is typically about  $\pm 1.2^\circ$ .

**Bally Penetrometer Test** - For the testing of shoe upper leathers for dynamic  
15 water repellency, a Bally Penetrometer test was utilized according to test procedure DIN 53338. For this test, a Bally Penetrometer Model 5023 (a standardized dynamic testing machine for shoe upper leather) was used. To simulate an upper leather in actual use, the test piece was alternatively buckled and stretched by the machine while in contact with water on one side. The values measured in this test are :

- 20 (1) the time elapsed until water first penetrates from one side of the test piece of treated leather to the other (for untreated leather, said time is typically less than 15 minutes), and
- (2) the weight percent increase of the test piece caused by water absorption during  
25 the test (for untreated leather, said weight increase is typically greater than 100% after one hour).

The test was run for a total of 6 hours, after which the percent water pickup was measured.

30 **Dynamic Saline Water Resistant Test (Maeser Flexes)** - The water resistance of the leathers was tested according to ASTM D-2009-70, using a Maeser water

penetration tester. The number of Maeser flexes required to induce water penetration into the leather was recorded. Since this test utilizes saline water, it is useful for predicting the resistance of leather to damage not only from water but also from perspiration.

5     Examples 1-10 and Comparative Examples C1-C4

          In this series of experiments, candidate repellents were each dissolved at 3% in either ethyl acetate, methyl isobutyl ketone or toluene or mixtures thereof. Then each resulting treating solution was applied to samples of (1) cowhide nubuck leather (Timberland's "Water Wheat Buck" cowhide nubuck leather, 1.6 mm, for footwear in  
10     crust condition, chrome tanned and dried, containing a hydrophobic fatliquor) and (2) grain leather, (similar to white athletic shoe leather). Application was done using a paint brush, until each surface was completely painted but not painted to the point of saturation (i.e., no free liquid was standing). Each treated leather sample was then allow to dry at room temperature, then the sample was tested for water repellency (WR) and oil  
15     repellency (OR).

          In Examples 1-10, various alkylated fluorochemical oligomers of this invention were evaluated. Each fluorochemical oligomer contained perfluorobutyl-terminated pendent groups ( $R_f$ ) except for the oligomer in Example 8, which contained  
20     perfluorooctyl-terminated pendent groups. The aliphatic moiety (R) was varied from 17 to 50 carbon atoms, and the linking group (L) in each case contained an ester group.

          In Comparative Examples C1-C2, copolymers of fluorochemical (meth)acrylates and long chain hydrocarbon acrylates having fluorine-free aliphatic groups ( $R_h$ ) containing  
25     either 18 or 50 carbon atoms were evaluated.

          In Comparative Examples C3-C4, esters of MeFOSE alcohol and long chain fatty acids were evaluated. Comparative Example C5 represents a fluoroaliphatic dimer acid derivative described as a useful leather repellent in European Patent EP 613462.

30

Results are presented in TABLE 1.



TABLE 1

Ex.	Repellent Composition	WR		OR	
		Nubuck	Grain	Nubuck	Grain
1	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	9	8	7	5
2	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	9	6	6	6
3	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>21</sub> H <sub>43</sub>	9	8	6	5
4	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>21</sub> H <sub>43</sub>	7	7	5	5
5	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOC-UNICID™ 700	4	2	--	--
6	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOC-UNICID™ 700	5	3	5	5
7	(MeFBSEMA) <sub>4</sub> -S- CH <sub>2</sub> CH(OOCC <sub>17</sub> H <sub>35</sub> )CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	8	9	5	6
8	(MeFOSEA) <sub>4</sub> -S- CH <sub>2</sub> CH(OOCC <sub>17</sub> H <sub>35</sub> )CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	4	3	6	6
9	[(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOC] <sub>2</sub> -EMPOL™ 1008	9	8	7	5
10	MeFBSEMA / ODA / HSCH <sub>2</sub> CH <sub>2</sub> COOCH <sub>3</sub>	8	6	3	3
C1	MeFBSEMA / UNILIN™ 700A / HSCH <sub>2</sub> CH <sub>2</sub> COOCH <sub>3</sub> (low MW copol.)	2	2	3	2
C2	MeFBSEMA / UNILIN™ 700A (high MW copol.)	4	3	0	0
C3	MeFOSE-UNICID™ 700	7	7	2	2
C4	2MeFOSE-EMPOL™ 1008	9	9	6	6

The data in TABLE 1 show that, in general, the alkylated fluorochemical  
 oligomers of this invention impart comparable or superior water and oil repellency to  
 leather as compared to the comparative treatments. This is accomplished even though the  
 pendent fluoroaliphatic groups in nearly all of the alkylated fluorochemical oligomers  
 contain only four carbon atoms. Comparative Examples C1-C2 show that generally  
 inferior oil repellency results when the long chain alkyl group is copolymerized with the  
 fluorochemical rather than post-reacted to form a linking group with the fluorochemical  
 oligomer. Comparative Example C3 shows that relatively poor oil performance is attained  
 when a single alkyl chain perfluorooctyl group-containing alcohol is reacted with a long

chain acid. In general, oil and water repellency imparted to leather by the alkylated fluorochemical oligomers of this invention is comparable to the that imparted by the leather treatment of Comparative Example C4 (described in European Patent EP 613462).

5 Also, advancing contact angles (ACA) and receding contact angles (RCA) in degrees were measured for each treated nylon film sample using both deionized water (DIW) and n-hexadecane (n-HD). In this series, (AC600)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub> was included as Example 11.

10 Contact angle results are presented in TABLE 2.

**TABLE 2**

Ex.	Repellent Composition	DIW		n-HD:	
		ACA	RCA	ACA	RCA
1	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	112	82	81	37
2	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	124	87	74	42
3	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>21</sub> H <sub>43</sub>	108	71	80	12
4	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>21</sub> H <sub>43</sub>	111	75	77	45
5	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOC-UNICID™ 700	137	79	90	24
6	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOC-UNICID™ 700	126	64	80	45
7	(MeFBSEMA) <sub>4</sub> -S- CH <sub>2</sub> CH(OOCC <sub>17</sub> H <sub>35</sub> )CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	122	70	78	6
8	(MeFOSEA) <sub>4</sub> -S- CH <sub>2</sub> CH(OOCC <sub>17</sub> H <sub>35</sub> )CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	120	103	79	73
9	[(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOC] <sub>2</sub> -EMPOL™ 1008	102	64	89	14
10	MeFBSEMA / ODA / HSCH <sub>2</sub> CH <sub>2</sub> COOCH <sub>3</sub>	123	81	77	8
11	(AC600) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	108	69	87	48
C1	MeFBSEMA / UNILIN™ 700A / HSCH <sub>2</sub> CH <sub>2</sub> COOCH <sub>3</sub> (low MW copol.)	123	74	77	30
C2	MeFBSEMA / UNILIN™ 700A (high MW copol.)	120	80	74	50
C3	MeFOSE-UNICID™ 700	131	103	87	63

Ex.	Repellent Composition	DIW		n-HD:	
		ACA	RCA	ACA	RCA
C4	2MeFOSE-EMPOL™ 1008	119	66	75	0

The data in TABLE 2 show that, in general, the alkylated fluorochemical oligomers of this invention impart comparable or superior advancing and receding contact angles as compared to the comparative treatments. Again, this is accomplished even though the pendent fluoroaliphatic groups in most of the alkylated fluorochemical oligomers contain only four carbon atoms. Due to their high receding contact angles against n-hexadecane, one would expect several of the alkylated fluorochemical oligomers to show excellent anti-staining performance, especially the oligomer of Example 8 which exhibits a 73° receding contact angle vs. n-hexadecane. The treatment used in Comparative Example C4 has susceptibility to soiling, as is predicted by the n-hexadecane receding contact angle value of zero.

#### Examples 12-15 and Comparative Examples C5-C6

Three fluorochemical repellent candidates were evaluated as leather treatments in a series of lab experiments designed to simulate field trials: (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>, (MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub> (both alkylated fluorochemical oligomers of this invention) and FC-3573, a commercial fluorochemical leather treatment. The leather used in this series of experiments was cowhide nubuck for shoe upper in crust condition, 1.6 mm (available from Incusa Tannery, Valencia, Spain). All wet processing was done via exhaustion using 33 cm diameter drums (Sandoz System, available from Werner Mathis AG, Switzerland), using 100 g of small leather samples for each experiment. All percentages of ingredients given below are based on the leather weight. For (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub>, (MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub> and FC-3573, the designated % of fluorochemical emulsion used was 7.8%, 8% and 5% respectively.

In Examples 12-13 and Comparative Example C6, each fluorochemical emulsion was "pasted" with the fatliquor. Prior to treatment with the oligomer emulsion/fatliquor

blend, the leather was processed as follows: (1) re-wet with 800% water at 40°C for 50 minutes, then drained of water, (2) neutralized using a mixture of 500% water and 2% sodium formate at 40°C for 20 minutes, followed by addition of 1.75% sodium bicarbonate for an additional 40 minutes, then drained, (3) then dyed with a mixture of  
5 400% water, 2.5% LUGANIL™ Brown NGB (available from BASF Corp., Germany) and 2% mimosa tannin at 35°C for 60 minutes, followed by addition of 0.75% formic acid for an additional 20 minutes, then drained. The pasting was done with 500% water at 50°C to which was added 9% EUPILON™ IN (available from TFL) and the designated % of  
10 fluorochemical emulsion at 50°C for 60 minutes, followed by addition of 0.75% formic acid for an additional 20 minutes, and then draining. The pasted leather was then chrome capped using a mixture of 500% water and 2.5% CHROMITAN™ B (available from BASF Corp.) at 40°C for 50 minutes, followed by draining, washing and drying.

In Examples 14-15 and Comparative Example C6, each fluorochemical emulsion  
15 was applied to nubuck leather via a "new bath" exhaustion procedure subsequent to a comparable re-wetting, neutralization, dyeing and fatliquoring process as described for pasting. In each case, (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub> was run at 7.8% fluorochemical emulsion concentration, (MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub> was run at 8% concentration and FC-3573 was run at 5% concentration, each concentration based on  
20 the weight of leather charged to the drum. The emulsion concentrations were chosen so that all three fluorochemical repellents were evaluated on the same percent solids basis, based on the weight of the leather.

For the new bath, the following procedure was used: (1) mixture of 500% water  
25 and designated % fluorochemical emulsion at 40°C for 45 minutes, (2) 0.3% formic acid for 15 minutes, (3) add 2.5% Cromitan™ B for 50 minutes, then drained.

Each dried treated leather sample was then evaluated for water repellency and oil repellency (WR. OR), initially and after abrasion by sandpaper (AWR, AOR), and also a  
30 spray rating (SR) was determined.

Results from these field trials are presented in TABLE 3.

TABLE 3

Ex.	Repellent Composition	Appl.	WR	AWR	OR	AOR	SR
12	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	pasted	6	5	1-5 *	0+	80
13	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	pasted	6	4	4	0+	80
C5	FC-3573	pasted	8	7	4	3	80
14	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	new bath	7	6	2-5 *	1	80
15	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	new bath	5	3	1-3 *	0+	80
C6	FC-3573	new bath	9	9	6	5	80

\* Results varied depending upon the location on the treated leather sample

#### Examples 16-19 and Comparative Examples C7-C8

A similar series of "pasting" and "new bath" experiments were conducted as described in Examples 12-15 and Comparative Examples C5-C6 except that wool-on sheepskin garment leather was substituted for nubuck leather. In each case, the designated % of fluorochemical emulsion used was: (MeFBSEA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub> at 6.2%, (MeFBSEMA)<sub>4</sub>-S-CH<sub>2</sub>CH<sub>2</sub>OOCC<sub>17</sub>H<sub>35</sub> at 6.5% and FC-3573 at 4% concentration, each concentration, each based on the weight of leather charged to the drum. Again, the emulsion concentrations were chosen so that all three fluorochemical repellents were evaluated on the same percent solids basis, based on the weight of the leather. For this leather, the following leather preparation procedures were used (again, percentages based on the weight of leather). Re-wetting: 1000% water at 40°C for 40 minutes, then drained. Neutralization: mixture of 1000% water, 2% sodium formate and 2% sodium bicarbonate at 40°C for 45 minutes, then drained. Dyeing/fatliquoring no fluorochemical – for "new bath": mixture of 1000% water and 2% ammonia at 50°C for 15 minutes, followed by addition of 2% LUGANIL BROWN NGT (available from BASF Corp.) for an additional 30 minutes, followed by addition of 8% REPELAN™ WR10 (available from Cromogenia, Spain) for an additional 45 minutes, followed by addition of 1.25% formic acid for an additional 20 minutes, followed by 1% formic acid for an additional 20 minutes, then drained.

For pasting (i.e. fluorochemical emulsion with fatliquor), the following sequential procedure used was: (1) mixture of 1000% water and 2% ammonia at 50°C for 15

minutes, (2) 2% LUGANIL™ Brown NGT added for an additional 30 minutes, (3) mixture of 1000% water, 8% REPELAN™ WR10, designated % fluorochemical emulsion and some 60°C water added for an additional 45 minutes, (4) 1.25% formic acid for an additional 20 minutes, and (5) 1% additional formic acid for an additional 20 minutes.

5

For the new bath, the following procedure was used: (1) mixture of 1000% water and designated % fluorochemical emulsion at 50°C for 45 minutes, (2) 0.5% formic acid for 15 minutes, then drained.

10

Results are presented in TABLE 4.

TABLE 4

Ex.	Repellent Composition	Appl.	WR	AWR	OR	AOR	SR
16	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	pasted	8	7	6	6	80
17	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	pasted	7	2	5	0+	80
C7	FC-3573	pasted	9	8	6	3	80
18	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	new bath	7	3	4	1	80
19	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	new bath	5	2	3	0+	80
C8	FC-3573	new bath	9	8	6	4	80

#### Examples 20-23 and Comparative Examples C9-C11

In Examples 20-23 and Comparative Examples C9-C10, treated nubuck leather samples from Examples 11-14 and Comparative Examples C6-C7, respectively, were evaluated for dynamic water resistance according to the Bally Penetrometer Test (to determine water penetration time in hours and percent water absorption) and for number of flexes before water penetration using the Dynamic Saline Water Resistance Test (i.e., number of Maeser flexes).

20

In Comparative Example C11, no treatment was applied (i.e., the fatliquor was applied without fluorochemical).

Results are presented in TABLE 5.

**TABLE 5**

Ex.	Repellent Composition	Appl.	Bally Test:		Maeser:
			Time	% Abs.	# Flexes
20	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	pasted	> 6	17	>150000
21	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	pasted	> 6	17	60000
C9	FC-3573	pasted	> 6	17	>150000
22	(MeFBSEA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	new bath	> 6	18	>150000
23	(MeFBSEMA) <sub>4</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>17</sub> H <sub>35</sub>	new bath	> 6	18	135000
C10	FC-3573	new bath	> 6	18	>150000
C11	None	---	180 min	20%*	13400

\*after 4 hours

5

In Examples 24-61 and Comparative Examples C12-C15, each fluorochemical emulsion was applied to nubuck leather and suede via a "new bath" exhaustion procedure subsequent to a comparable re-wetting, neutralization, dyeing and fatliquoring process as described for pasting. In each case, the comparative Examples C12-C15 were run at 5% concentration, each concentration based on the weight of leather charged to the drum. The emulsion concentrations were chosen so that all three fluorochemical repellents were evaluated on the same percent solids basis, based on the weight of the leather.

10

For the new bath, the following procedure was used: (1) mixture of 500% water and designated % fluorochemical emulsion at 40°C for 45 minutes, (2) 0.3% formic acid for 15 minutes, (3) add 2.5% Cromitan™ B for 50 minutes, then drained.

15

Each dried treated leather sample was then evaluated for water repellency and oil repellency (WR, OR), initially and after abrasion by sandpaper (AWR, AOR), and also a spray rating (SR) was determined.

20

Results from these field trials are presented in TABLE 6.

TABLE 6

Ex	Repellent Composition	Grain					Suede				
		OR	WR	AOR	AWR	SR	OR	WR	AOR	AWR	SR
24	(MeFBSEA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	2.5	3	2	3	70W	6	7	6	6.5	70
25	(MeFBSEA) <sub>4</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	2.5	3	1.5	2.5	70	6	8.5	6	8	75
26	(MeFBSEA) <sub>6</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	3	4	1.5	2.5	75	6	4,5 (°)	6	6.5	80
27	(MeFBSEA) <sub>8</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	2.5	3	1.5	1.5	75	6	8	5.5	7	80
28	(MeFBSEA) <sub>12</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	0.5	2	0	1.5	75	6	7	5	7	80
29	(MeFBSEA) <sub>20</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	0.5	1	0	0.5	75	5.5	6.5	3	5	80
C12	FC-3573	2.5	4	1	3	80	6	8.5	6	8.5	80
30	(MeFBSEA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	2	2	0.5	2	70	5	2.5	6	2	70
31	(MeFBSEA) <sub>4</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	2.5	3	2	3	70	6	4	6	4.5	75
32	(MeFBSEA) <sub>6</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	2.5	2.5	2	1	75	5	4	5	6	75
33	(MeFBSEA) <sub>8</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	1	2.5	0	1	75	6	3	5	3.5	75
34	(MeFBSEA) <sub>12</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	1	2	0	1	70	5	6	4.5	6	75
35	(MeFBSEA) <sub>20</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	1	2.5	0	1	70	3	4.5	4.5	3	75
36	(MeFBSEA) <sub>3</sub> (ODA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	1	2	0	3	50	2	8	3	8	75
37	(MeFBSEA) <sub>3</sub> (iODA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	1	0	1	50	1	3+	0	4	75
38	(MeFBSEA) <sub>3</sub> (LA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	1	2	1	2	50	2	7	2	7	75



39	(MeFBSEA) <sub>3</sub> (EHA)-S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	1	0	1	50	1	4	1	4	75
40	(MeFBSEA) <sub>3</sub> (BA)-S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	1	0	1	50	1	4	1	4	75
41	(MeFBSEA) <sub>3</sub> (iBA)-S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	1	0	1	50	0	2	0	2	75
42	(MeFBSEA) <sub>3</sub> (MA)-S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	2	0	2	50	4	4	3	4	75
C13	FC-3573	2+	3	2	3	70	5	9	5	9	80
43	(MeFBSEA) <sub>4</sub> (ODA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	1	3	2	3	60	3+	8	2	8	75
44	(MeFBSEA) <sub>4</sub> (iODA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	1	0	1	50	1	4	0	3	75
45	(MeFBSEA) <sub>4</sub> (LA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	2	0	3	60	4	8	1	6	75
46	(MeFBSEA) <sub>4</sub> (EHA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	2	0	1	50	1	4	0	4	80
47	(MeFBSEA) <sub>4</sub> (BA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	2	0	1	50	0	2	0	2	70
48	(MeFBSEA) <sub>4</sub> (iBA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	1	0	1	50	0	2	0	2	75
49	(MeFBSEA) <sub>4</sub> (MA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	1	0	1	50	3	4	1	4	75
50	(MeFBSEA) <sub>3</sub> (ODMA)-S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	1	2	0	2	60	2+	8	2	7	75
51	(MeFBSEA) <sub>3</sub> (LMA)-S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	2	0	2	50	3+	6	2	6	75
52	(MeFBSEA) <sub>3</sub> (EHMA)-S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	2	0	2	60	2	4	0	4	75
53	(MeFBSEA) <sub>3</sub> (BMA)-S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	1	2	1	2	50	1	4	1	4	75
54	(MeFBSEA) <sub>3</sub> (iBMA)-S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	1	0	1	60	0	4	1	4	75
55	(MeFBSEA) <sub>3</sub> (MMA)-S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	2	0	1	60	4	4	3	4	75
C14	FC-3573	2	8	2	8	70	5	9	6	9	80
56	(MeFBSEA) <sub>4</sub> (ODMA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	3	0	3	60	3	7	3	7	75
57	(MeFBSEA) <sub>4</sub> (LMA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	4	0	4	60	4	7	2	7	75
58	(MeFBSEA) <sub>4</sub> (EHMA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	1	0	1	50	1+	4	0	4	75
59	(MeFBSEA) <sub>4</sub> (BMA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	2	0	1	50	1	4	0	4	75
60	(MeFBSEA) <sub>4</sub> (iBMA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	0	1	0	1	60	1	4	1	4	70
61	(MeFBSEA) <sub>4</sub> (MMA) <sub>2</sub> -S-CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	1	2	1	2	50	5	6	5	5	70
C15	FC-3573	2	7	1	5	70	5	8	5	9	80

In Examples 24-61 and Comparative Examples C12-C15, treated nubuck leather samples were evaluated for dynamic water resistance according to the Bally Penetrometer Test (to determine water penetration time in hours and percent water absorption). Results are presented in Table 7.

TABLE 7

Ex	Repellent Composition	Bally Grain Side	
		Time (min)	Abs % (2 hrs.)
24	(MeFBSEA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	30	25
25	(MeFBSEA) <sub>4</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	30	44
26	(MeFBSEA) <sub>6</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	30	51
27	(MeFBSEA) <sub>8</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	100	46
28	(MeFBSEA) <sub>12</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	100	48
29	(MeFBSEA) <sub>20</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>18</sub> H <sub>37</sub>	10	67
C12	FC-3573	60	41
30	(MeFBSEA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	30/30	29
31	(MeFBSEA) <sub>4</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	45/30	51
32	(MeFBSEA) <sub>6</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	30/15	31
33	(MeFBSEA) <sub>8</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	30/45	57
34	(MeFBSEA) <sub>12</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	30/15	30
35	(MeFBSEA) <sub>20</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>8</sub> H <sub>17</sub>	15/15	35
36	(MeFBSEA) <sub>3</sub> (ODA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	97.5	14
37	(MeFBSEA) <sub>3</sub> (iODA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	75.5	23

38	(MeFBSEA) <sub>3</sub> (LA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	30	21
39	(MeFBSEA) <sub>3</sub> (EHA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	90	31
40	(MeFBSEA) <sub>3</sub> (BA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	45	64
41	(MeFBSEA) <sub>3</sub> (iBA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	120	14
42	(MeFBSEA) <sub>3</sub> (MA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	37.5	34
C13	FC-3573	90	20
43	(MeFBSEA) <sub>4</sub> (ODA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	97.5	12
44	(MeFBSEA) <sub>4</sub> (iODA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	30	62
45	(MeFBSEA) <sub>4</sub> (LA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	120	13
46	(MeFBSEA) <sub>4</sub> (EHA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	22.5	61
47	(MeFBSEA) <sub>4</sub> (BA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	22.5	69
48	(MeFBSEA) <sub>4</sub> (iBA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	120	23
49	(MeFBSEA) <sub>4</sub> (MA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	60	17
50	(MeFBSEA) <sub>3</sub> (ODMA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	45	23
51	(MeFBSEA) <sub>3</sub> (LMA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	15	30
52	(MeFBSEA) <sub>3</sub> (EHMA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	60	18
53	(MeFBSEA) <sub>3</sub> (BMA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	30	16
54	(MeFBSEA) <sub>3</sub> (iBMA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	97.5	13
55	(MeFBSEA) <sub>3</sub> (MMA)-S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	97.5	36
C14	FC-3573	60	15
56	(MeFBSEA) <sub>4</sub> (ODMA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	67.5	21
57	(MeFBSEA) <sub>4</sub> (LMA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	82.5	24
58	(MeFBSEA) <sub>4</sub> (EHMA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	37.5	49
59	(MeFBSEA) <sub>4</sub> (BMA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	45	30
60	(MeFBSEA) <sub>4</sub> (iBMA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	75	24
61	(MeFBSEA) <sub>4</sub> (MMA) <sub>2</sub> -S- CH <sub>2</sub> CH <sub>2</sub> OOCC <sub>12</sub> H <sub>25</sub>	112.5	12
C15	FC-3573	22.5	13

## Claims

We claim:

1. A method of treating fibrous substrates comprising contacting the fibrous substrate  
5 with composition comprising an alkylated fluorochemical oligomeric compound  
comprising:

(i) at least one fluorochemical oligomeric portion comprising an aliphatic  
backbone with a plurality of fluoroaliphatic groups attached thereto, each fluoroaliphatic  
10 group having a fully fluorinated terminal group and each independently linked to a carbon  
atom of the aliphatic backbone through an organic linking group;

(ii) at least one aliphatic moiety; and

(iii) a linking group which links the fluorochemical oligomeric portion to the  
aliphatic moiety.

15

2. The method of claim 1 wherein said an alkylated fluorochemical oligomeric  
compound comprises:

(i) at least one oligomeric portion having both fluoroaliphatic and fluorine-free  
20 aliphatic pendent groups;

(ii) at least one aliphatic moiety; and

(iii) a linking group which links the oligomeric portion to the aliphatic moiety.

3. The method of claim 1 wherein said fluorochemical compounds are selected from  
25 the group consisting of:

$[(A)_m-L]_nR$  and  $(A)_m[L-R]_n$ ,


wherein m is 1 to 4 inclusive;

n is 1 to 4 inclusive;

each L independently comprises a linking group;

30 R is an organic aliphatic moiety; and

A is a fluorochemical oligomeric portion of the formula:



wherein

a is a number such that A is oligomeric and comprises a plurality of R<sub>f</sub> groups;

each R<sub>1</sub> is independently hydrogen, halogen, or straight chain or branched chain alkyl

5 containing 1 to about 4 carbon atoms;


each R<sub>2</sub> is independently hydrogen or straight chain or branched chain alkyl containing 1 to about 4 carbon atoms;

each Q is a covalent bond or an organic linking group;

R<sub>f</sub> is a fluoroaliphatic group;

10 X is a hydrogen atom or a group derived from a free radical initiator.

4. The method of claim 2 wherein said fluorochemical compounds are selected from the group consisting of:



15 wherein m is 1 to 4 inclusive;


n is 1 to 4 inclusive;

each L independently comprises a linking group;

R is an organic aliphatic moiety; and

A is a fluorochemical oligomeric portion of the formula

20

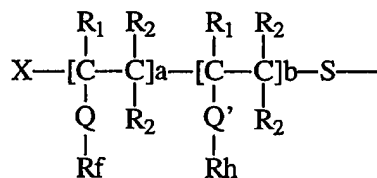

wherein the sum of a + b is a number such that A is oligomeric,

each R<sub>1</sub> independently is hydrogen, halogen, or straight chain or branched chain alkyl

25 containing 1 to about 4 carbon atoms;

each  $R_2$  is independently hydrogen or straight chain or branched chain alkyl containing 1 to about 4 carbon atoms;

Q and Q' are each independently a covalent bond or an organic linking group,

$R_f$  is a fluoroaliphatic group; and

5  $R_h$  is a fluorine-free aliphatic group;

5. The method of claim 3 wherein a is 2 to 25.

6. The method of claim 4 wherein the sum of a + b is 2 to 25.

10

7. The method of claims 3 or 4 wherein  $R_f$  contains 3 to 20 carbon atoms.

8. The method according to any of claims 1 to 7 wherein said composition is in the form of an aqueous dispersion, an aqueous emulsion or a solution in an organic solvent

15

9. The method any of claims 1 to 8 wherein said substrate is leather.

10. The method according to claim 9 wherein said leather is contacted with said aqueous dispersion during wet-end processing.

20

11. The method according to claims 3 or 4 wherein at least one of said R and  $R_h$  groups has 8 or more carbon atoms.

12. A treated fibrous substrate prepared according to the method of any of claims 1-8.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
16 May 2002 (16.05.2002)

PCT

(10) International Publication Number  
**WO 02/038850 A3**

- (51) International Patent Classification<sup>7</sup>: **D06M 15/277**, C14C 9/00, D06M 13/156, 13/265
- (21) International Application Number: PCT/US01/46983
- (22) International Filing Date:  
6 November 2001 (06.11.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/708,372 8 November 2000 (08.11.2000) US
- (71) Applicant (*for all designated States except US*): **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **JARIWALA, Chetan P.** [US/US]; 3164 Copper Oaks Trail, Woodbury, MN 55125 (US). **EGGLESTON, James D.** [US/US]; 400 Selvy Avenue, Apartment 212, Saint Paul, MN 55102 (US). **YANDRASITS, Michael A.** [US/US]; 323 Ramsey Street, Hastings, MN 55033 (US). **DAMS, Rudolf J.** [BE/BE]; Schuttershof 19, B-2070 Zwijndrecht (BE). **COPPENS, Dirk M.** [BE/BE]; Tijmstraat 30, B-9120 Melsele (BE).
- (54) Title: **ALKYLATED FLUORO-CHEMICAL OLIGOMERS AND USE THEREOF IN THE TREATMENT OF FIBROUS SUBSTRATES**
- (57) Abstract: This invention provides a method of treating fibrous substrates, such as leather, by contacting the substrate with a fluorochemical compound comprising: a fluorochemical oligomeric portion comprising an aliphatic backbone with a plurality of pendant fluoroaliphatic groups, each fluoroaliphatic group having a fully fluorinated terminal group and each independently linked to a carbon atom of the aliphatic backbone through an organic linking group; an aliphatic moiety; and a linking group which links the fluorochemical oligomeric portion to the aliphatic moiety. The fluorochemical compounds provide desirable oil, water and stain repellency to fibrous substrates.
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- (88) Date of publication of the international search report:  
3 January 2003
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



**WO 02/038850 A3**

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/46983

A. CLASSIFICATION OF SUBJECT MATTER  
 IPC 7 D06M15/277 C14C9/00 D06M13/156 D06M13/265

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 D06M C14C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 92 17635 A (MINNESOTA MINING & MFG) 15 October 1992 (1992-10-15) cited in the application page 9, line 2 -page 10, line 18 page 65, line 30 - line 32 page 101, line 20 -page 102, line 16 ---	1-12
X	WO 92 17517 A (MINNESOTA MINING & MFG) 15 October 1992 (1992-10-15) page 7, line 21 -page 8, line 33 page 33, line 3 - line 13 ---	1-12
X	EP 0 422 954 A (MINNESOTA MINING & MFG) 17 April 1991 (1991-04-17) page 3, line 30 - line 52 page 5, line 52 -page 7, line 10 ---	1,2,4, 6-12
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*8\* document member of the same patent family

Date of the actual completion of the international search

3 September 2002

Date of mailing of the international search report

12/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Flocco, M



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/46983

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 93 01348 A (MINNESOTA MINING & MFG) 21 January 1993 (1993-01-21) page 6, line 10 -page 8, line 28 page 11, line 6 - line 17 page 15, line 8 -page 16, line 25 -----	1,2,4, 6-12
X,P, L	WO 00 68189 A (3M INNOVATIVE PROPERTIES CO) 16 November 2000 (2000-11-16) may throw doubts on priority claim page 5, line 15 -page 6, line 19 page 17, line 1 - line 9 -----	1-3,5, 7-12

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/46983

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9217635	A	15-10-1992	US 5276175 A	04-01-1994
			BR 9205842 A	02-08-1994
			CA 2105301 A1	03-10-1992
			DE 69204831 D1	19-10-1995
			DE 69204831 T2	28-03-1996
			EP 0578651 A1	19-01-1994
			JP 3242920 B2	25-12-2001
			JP 6506239 T	14-07-1994
			KR 214322 B1	02-08-1999
			WO 9217635 A1	15-10-1992
			US 5453540 A	26-09-1995
WO 9217517	A	15-10-1992	US 5292796 A	08-03-1994
			BR 9205829 A	23-08-1994
			CA 2105298 A1	03-10-1992
			DE 69225796 D1	09-07-1998
			DE 69225796 T2	24-12-1998
			EP 0578743 A1	19-01-1994
			JP 6505523 T	23-06-1994
			KR 225989 B1	15-10-1999
			WO 9217517 A1	15-10-1992
EP 0422954	A	17-04-1991	US 5098446 A	24-03-1992
			AU 627935 B2	03-09-1992
			AU 6302990 A	18-04-1991
			CA 2025027 A1	14-04-1991
			DE 69020680 D1	10-08-1995
			DE 69020680 T2	14-03-1996
			EP 0422954 A1	17-04-1991
			ES 2074137 T3	01-09-1995
			JP 3134100 A	07-06-1991
			NZ 235213 A	28-04-1993
			PT 95552 A	14-08-1991
			TR 25866 A	01-09-1993
WO 9301348	A	21-01-1993	AU 653629 B2	06-10-1994
			AU 2299292 A	11-02-1993
			DE 69210608 D1	13-06-1996
			DE 69210608 T2	05-12-1996
			EP 0593617 A1	27-04-1994
			JP 6509146 T	13-10-1994
			JP 3210336 B2	17-09-2001
			KR 231226 B1	15-11-1999
			WO 9301348 A1	21-01-1993
			US 5370919 A	06-12-1994
WO 0068189	A	16-11-2000	US 6288157 B1	11-09-2001
			AU 5800199 A	21-11-2000
			WO 0068189 A1	16-11-2000